


8 7 6 5 4 3 2 1




AS SUPPLIED
(EXPANDED STATE)

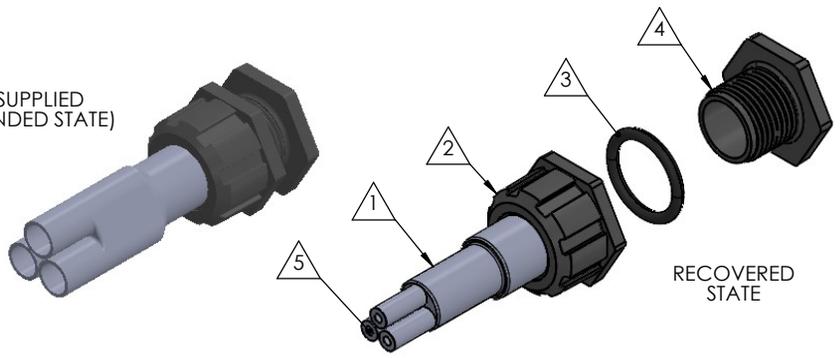

RECOVERED STATE

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	12/1/2025
B	REFINE DIMENSIONS AND DECIMAL PRECISION	12/16/2025
C	UPDATE TOLERANCE TABLE	12/30/2025

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:
ASSEMBLY MAY BE INSTALLED IN PANELS FROM
0.07"(1.8mm) - 0.38"(9.5mm).
RECCOMENDED DRILL HOLE DIAMETER
OF 1.00" (25.4mm)

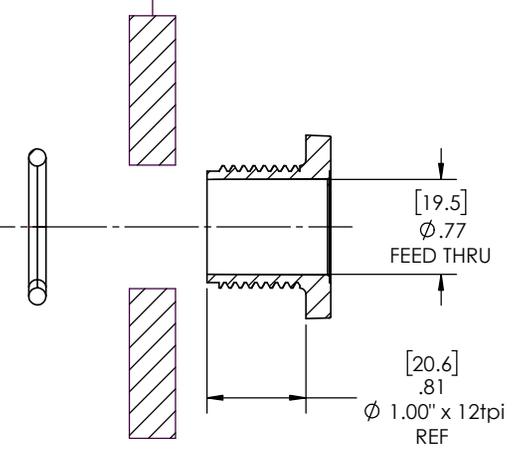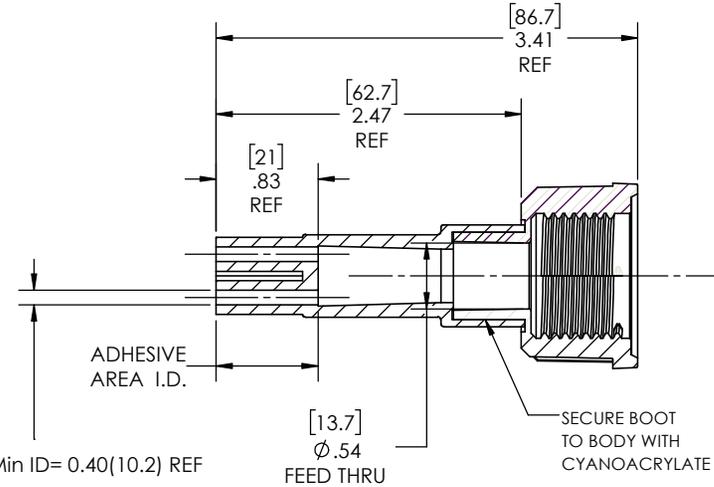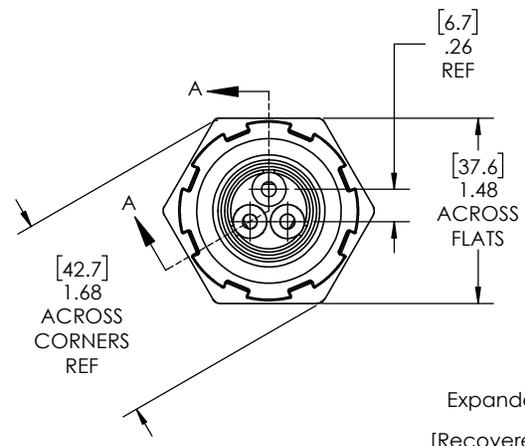

Expanded Min ID= 0.40(10.2) REF
[Recovered Max ID= 0.11(2.8)] REF

SECTION A-A
RECOVERED
SCALE 1 : 1

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	Heat-shrinkable boot	NUBB3-1	Flame Retardant Polyolefin
2	Body	S-1B	Glass Fiber Reinforced, PBT
3	O-ring	AS-214	Buna
4	Nut	S-1/S-2N	Glass Fiber Reinforced, PBT
5	Adhesive		Hotmelt Polyamide

NU-TECH

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/32
ONE DECIMAL PLACE ± 0.060
TWO DECIMAL PLACE ± 0.025
THREE DECIMAL PLACE ± 0.010
DO NOT SCALE DRAWING

PART NO. 1-NUS-3A	
DWG. NO. 1-NUS-3A-ASSY	
WEIGHT: 0.089	REV C
SCALE: 1:1	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

8 7 6 5 4 3 2 1