

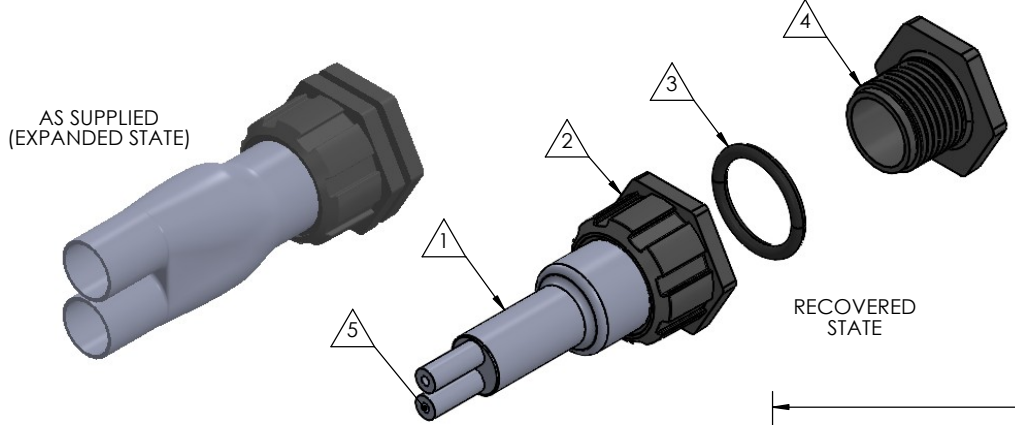
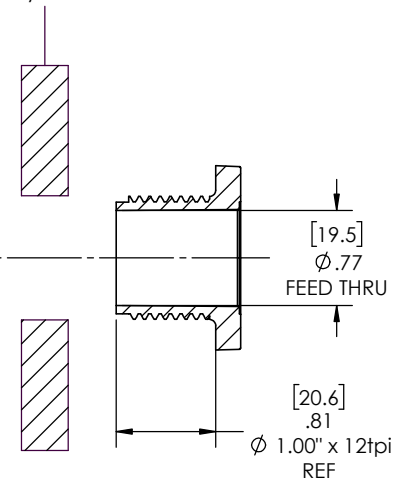


8 7 6 5 4 3 2 1

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	12/11/2025
B	REFINE DIMENSIONS AND DECIMAL PRECISION	12/16/2025
C	UPDATE TOLERANCE TABLE	12/30/2025

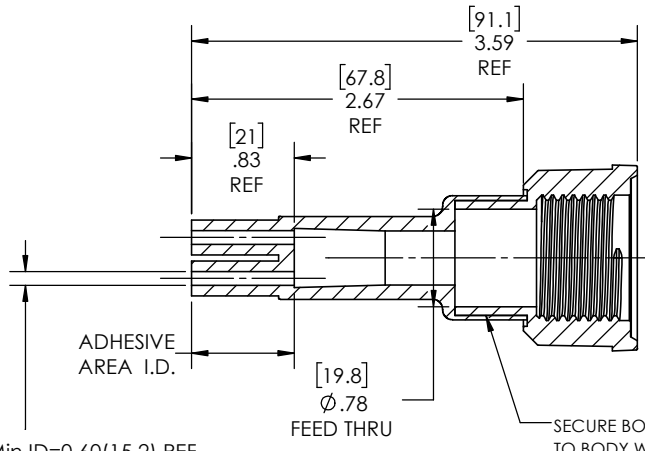

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:  
 ASSEMBLY MAY BE INSTALLED IN PANELS FROM  
 0.07" (1.8mm) - 0.38" (9.5mm).  
 RECOMMENDED DRILL HOLE DIAMETER  
 OF 1.00" (25.4mm)

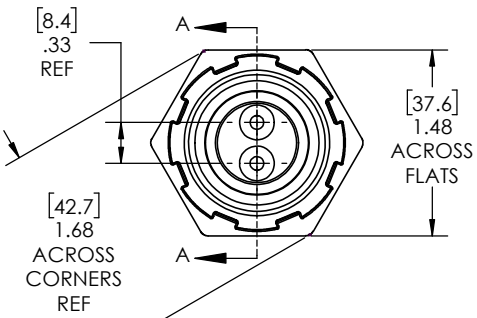

Expanded Min ID=0.60(15.2) REF  
 [Recovered Max ID=0.11(2.8)] REF

SECTION A-A  
 RECOVERED  
 SCALE 1 : 1

- NOTES:
- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
  - FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	Heat-shrinkable boot	NUBB2-1	Flame Retardant Polyolefin
2	Body	S-2B	Glass Fiber Reinforced, PBT
3	O-ring	AS-214	Buna
4	Nut	S-1/S-2N	Glass Fiber Reinforced, PBT
5	Adhesive		Hotmelt Polyamide

**NU-TECH**

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 FRACTIONAL ±1/32  
 ONE DECIMAL PLACE ± 0.060  
 TWO DECIMAL PLACE ± 0.025  
 THREE DECIMAL PLACE ± 0.010  
 DO NOT SCALE DRAWING

PART NO. <b>2-NUS-2A</b>	
DWG. NO. <b>2-NUS-2A-ASSY</b>	
WEIGHT: <b>0.088</b>	REV <b>C</b>
DRAWN: MLJ	DATE: 2/3/2026
SCALE: 1:1	SHEET 1 OF 1

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF  
 Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE  
 WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

8 7 6 5 4 3 2 1