
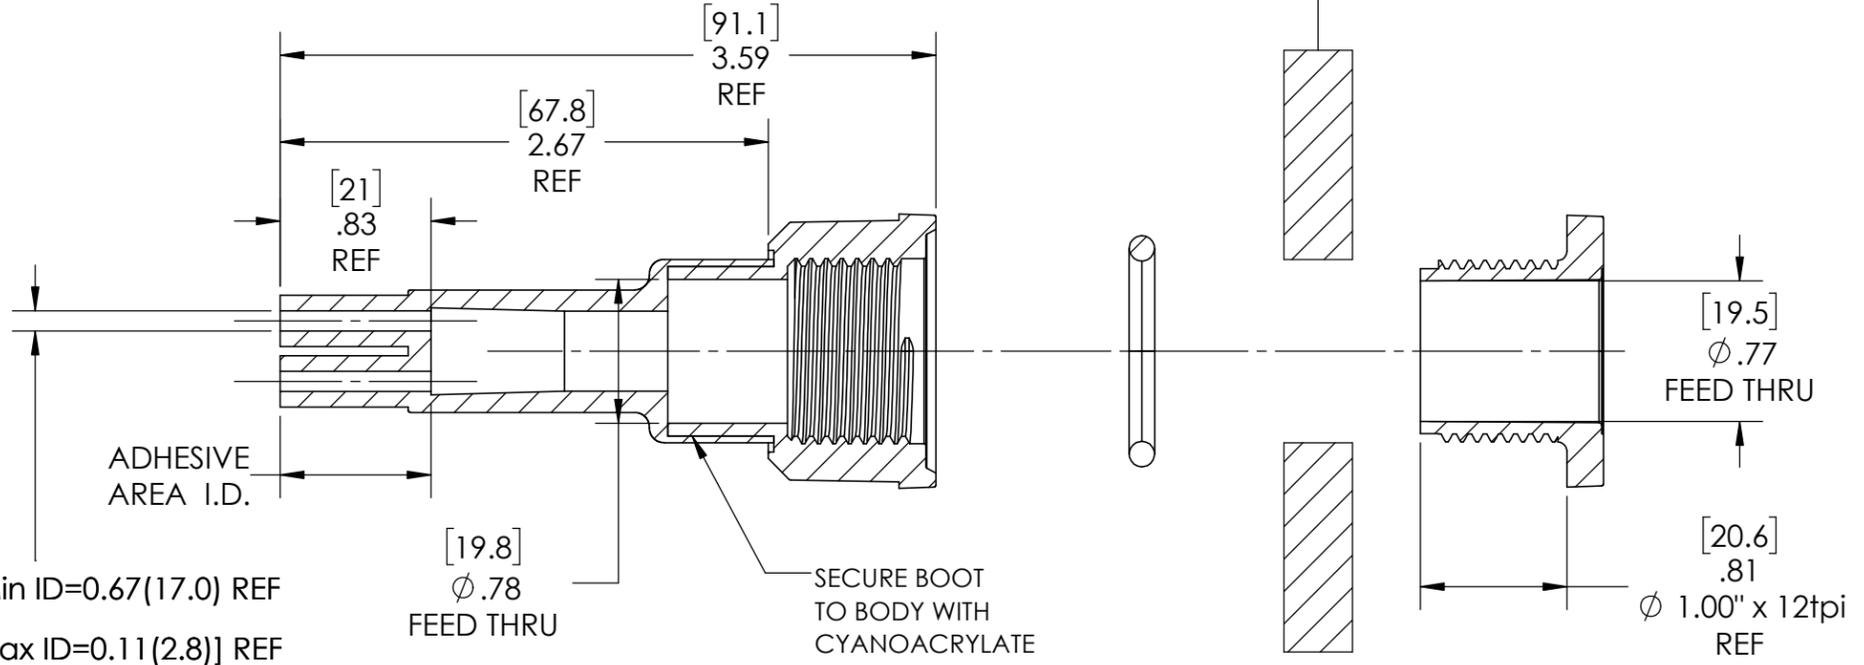


REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	12/1/2025
B	REFINE DIMENSIONS AND DECIMAL PRECISION	12/16/2025
C	UPDATE TOLERANCE TABLE	12/30/2025

AS SUPPLIED  
(EXPANDED STATE)

RECOVERED  
STATE

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:  
ASSEMBLY MAY BE INSTALLED IN PANELS FROM  
0.07"(1.8mm) - 0.38"(9.5mm).  
RECCOMENDED DRILL HOLE DIAMETER  
OF 1.00" (25.4mm)

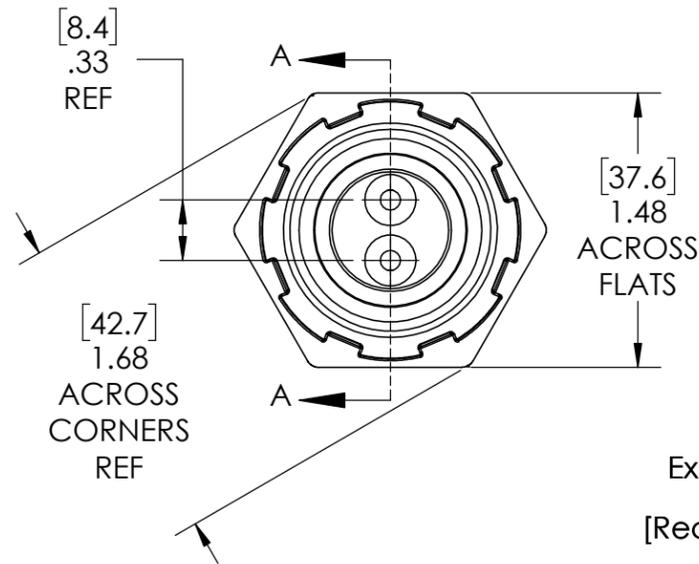

Expanded Min ID=0.67(17.0) REF  
[Recovered Max ID=0.11(2.8)] REF

SECTION A-A  
RECOVERED  
SCALE 1 : 1

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
①	Heat-shrinkable boot	NUBB2-1	Flame Retardant Polyolefin
②	Body	S-2B	Glass Fiber Reinforced, PBT
③	O-ring	AS-214	Buna
④	Nut	S-1/S-2N	Glass Fiber Reinforced, PBT
⑤	Adhesive		Hotmelt Polyamide

**NU-TECH**

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL ±1/32  
ONE DECIMAL PLACE ± 0.060  
TWO DECIMAL PLACE ± 0.025  
THREE DECIMAL PLACE ± 0.010

PART NO.  
**2-NUS-2AOE**  
DWG. NO. 2-NUS-2AOE-ASSY

DO NOT SCALE DRAWING

WEIGHT: 0.087 REV C

DRAWN: MLJ

DATE: 3/10/2026

SCALE: 1:1

SHEET 1 OF 1