


8 7 6 5 4 3 2 1

| REVISIONS | | |
|-----------|-----------------------------------------|------------|
| REV. | DESCRIPTION | DATE |
| A | UPDATE DRAWING TO 2025 STANDARDS | 12/1/2025 |
| B | REFINE DIMENSIONS AND DECIMAL PRECISION | 12/16/2025 |
| C | UPDATE TOLERANCE TABLE | 12/30/2025 |

AS SUPPLIED
(EXPANDED STATE)

RECOVERED
STATE

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:
ASSEMBLY MAY BE INSTALLED IN PANELS FROM
0.07"(1.8mm) - 0.38"(9.5mm).
RECOMMENDED DRILL HOLE DIAMETER
OF 1.00" (25.4mm)

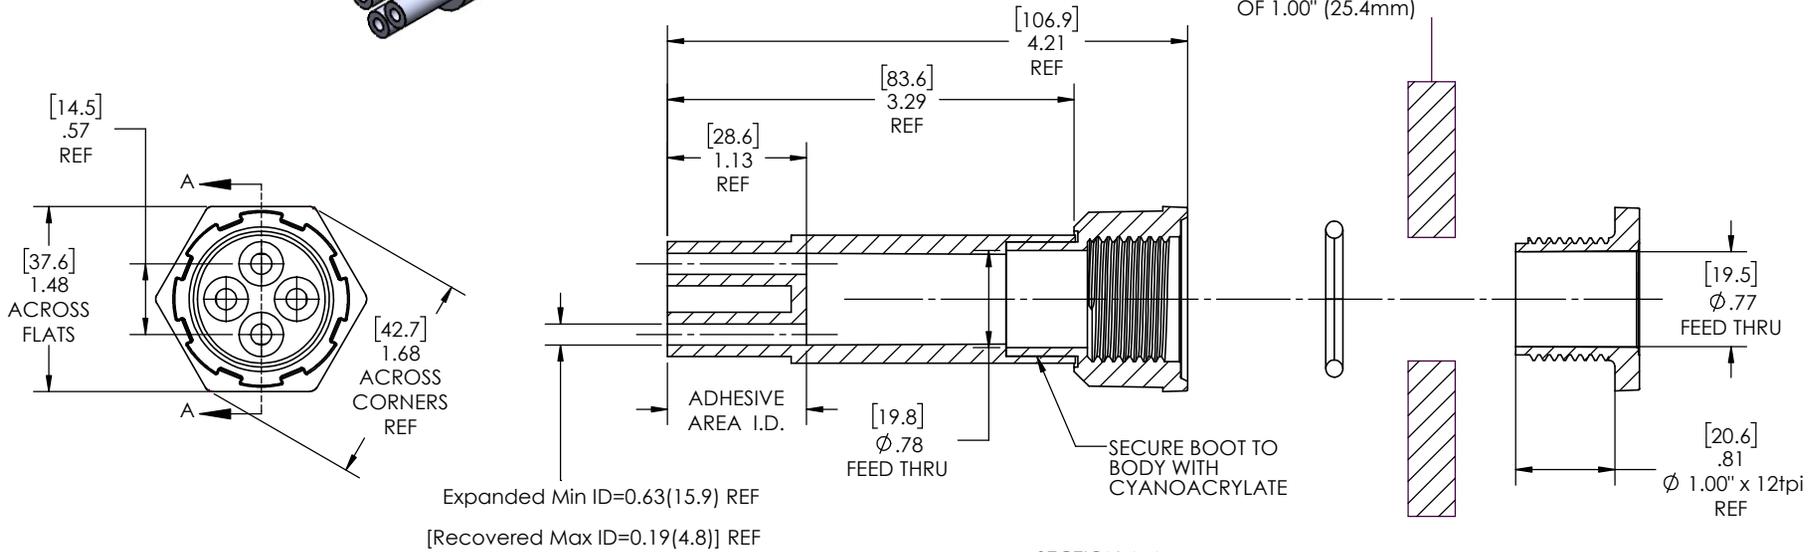

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

| ITEM | PART DESCRIPTION | PART NO. | MATERIAL |
|------|----------------------|----------|-----------------------------|
| 1 | Heat-shrinkable boot | NUBB4-2 | Flame Retardant Polyolefin |
| 2 | Body | S-2B | Glass Fiber Reinforced, PBT |
| 3 | O-ring | AS-214 | Buna |
| 4 | Nut | S-1/S-2N | Glass Fiber Reinforced, PBT |
| 5 | Adhesive | | Hotmelt Polyamide |

NU-TECH

| | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|----------------|
| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ±1/32 ONE DECIMAL PLACE ± 0.060 TWO DECIMAL PLACE ± 0.025 THREE DECIMAL PLACE ± 0.010 DO NOT SCALE DRAWING | PART NO. 2-NUS-4B | |
| | DWG. NO. 2-NUS-4B-ASSY | |
| | WEIGHT: 0.093 | REV C |
| | DRAWN: MLJ | DATE: 2/3/2026 |

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

8 7 6 5 4 3 2 1