


8 7 6 5 4 3 2 1

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	12/2/2025
B	REFINE DIMENSIONS AND DECIMAL PRECISION	12/16/2025
C	UPDATE TOLERANCE TABLE	12/30/2025



AS SUPPLIED  
(EXPANDED STATE)

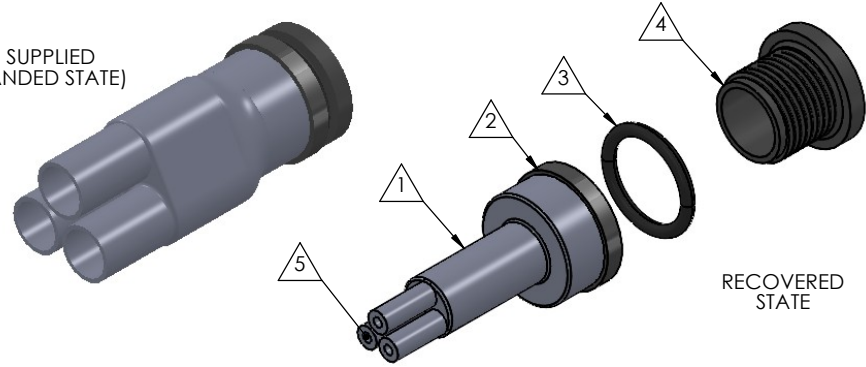

RECOVERED  
STATE

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:  
ASSEMBLY MAY BE INSTALLED IN PANELS FROM  
0.08" (2.0mm) - 0.35" (8.9mm).  
RECCOMENDED DRILL HOLE DIAMETER  
OF 1.00" (25.4mm)

Expanded Min ID= 0.50(12.7) REF  
[Recovered Max ID= 0.11(2.8)] REF

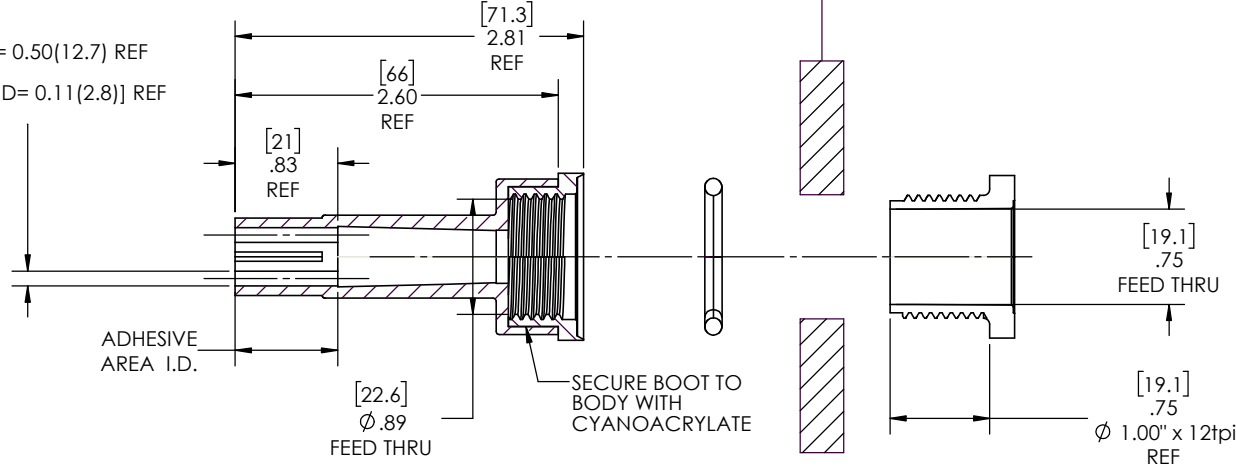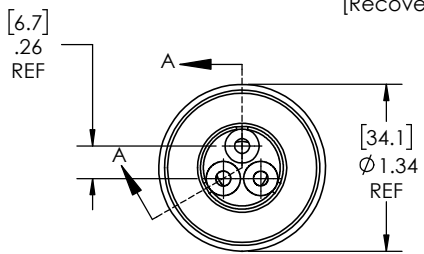

SECTION A-A  
RECOVERED  
SCALE 1:1

- NOTES:
- ITEM #1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
  - FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	Heat-shrinkable boot	NUBB3-1	Flame Retardant Polyolefin
2	Body	S-2XB	Glass Fiber Reinforced, PBT
3	O-ring	AS-214	Buna
4	Nut	S-2XN	Glass Fiber Reinforced, PBT
5	Adhesive		Hotmelt Polyamide

**NU-TECH**

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: 1/32 ONE DECIMAL PLACE: ± 0.060 TWO DECIMAL PLACE: ± 0.025 THREE DECIMAL PLACE: ± 0.010 DO NOT SCALE DRAWING	PART NO.	
	<b>2X-NUS-3A</b>	
	DWG. NO.	2X-NUS-3A-ASSY
	WEIGHT:	0.053
DRAWN: MLJ	DATE: 2/3/2026	REV C
SCALE:	1:1	SHEET 1 OF 1

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

8 7 6 5 4 3 2 1