


8 7 6 5 4 3 2 1



REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	12/3/2025
B	REFINE DIMENSIONS AND DECIMAL PRECISION	12/16/2025
C	UPDATE TOLERANCE TABLE	12/30/2025

AS SUPPLIED  
(EXPANDED STATE)

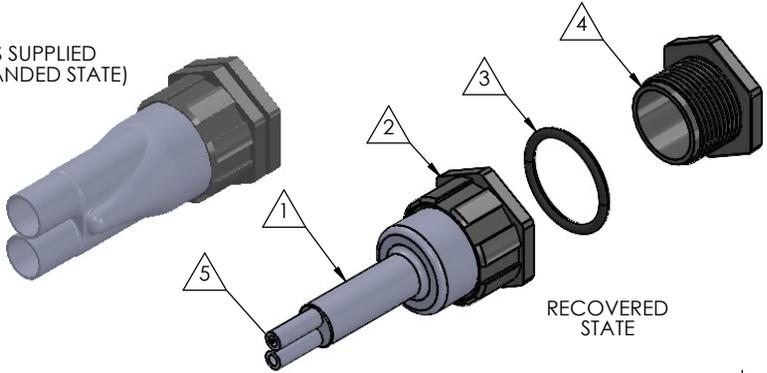

RECOVERED  
STATE

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:  
ASSEMBLY MAY BE INSTALLED IN PANELS FROM  
0.08"(2.0mm) - 0.49"(12.4mm).  
RECOMMENDED DRILL HOLE DIAMETER  
OF 1.38" (34.9mm)

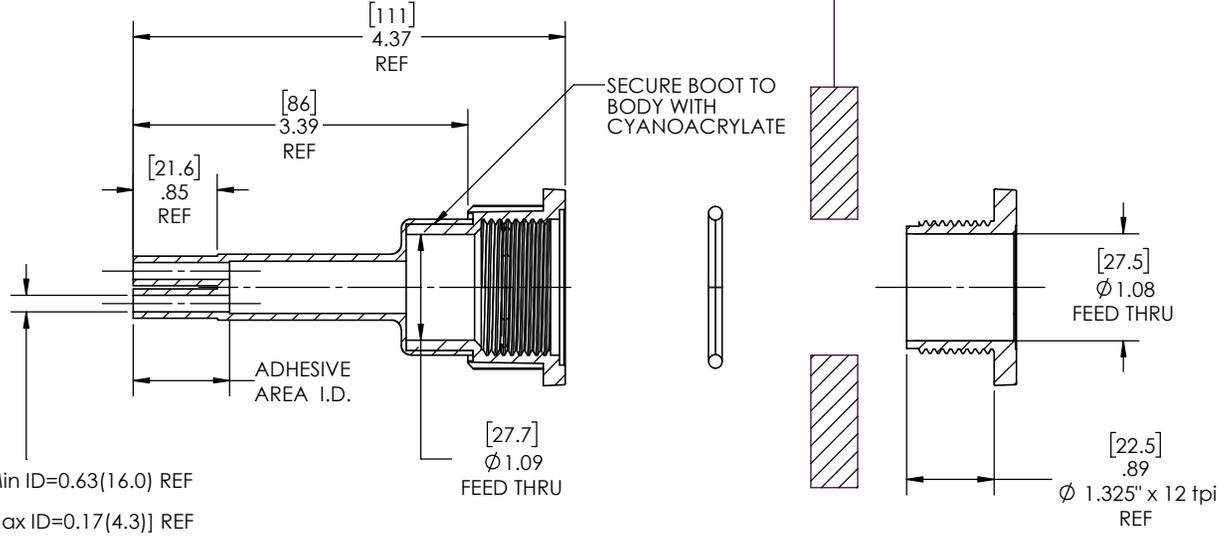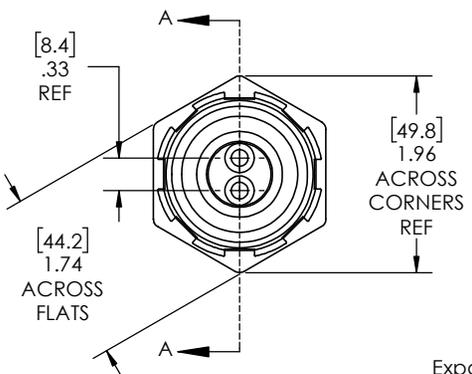

SECTION A-A  
RECOVERED  
SCALE 1 : 1.25

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	Heat-shrinkable boot	NUBB2-2	Flame Retardant Polyolefin
2	Body	S-3B	Glass Fiber Reinforced, PBT
3	O-ring	AS-220	Buna
4	Nut	S-3N	Glass Fiber Reinforced, PBT
5	Adhesive		Hotmelt Polyamide

**NU-TECH**

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ±1/32 ONE DECIMAL PLACE ± 0.005 TWO DECIMAL PLACE ± 0.0025 THREE DECIMAL PLACE ± 0.0010 DO NOT SCALE DRAWING	PART NO. <b>3-NUS-2B</b>	
	DWG. NO. <b>3-NUS-2B-ASSY</b>	
	WEIGHT: <b>0.101</b>	REV <b>C</b>
DRAWN: MLJ	DATE: 2/3/2026	SCALE: 1:1.25

8 7 6 5 4 3 2 1