


8 7 6 5 4 3 2 1


AS SUPPLIED  
(EXPANDED STATE)

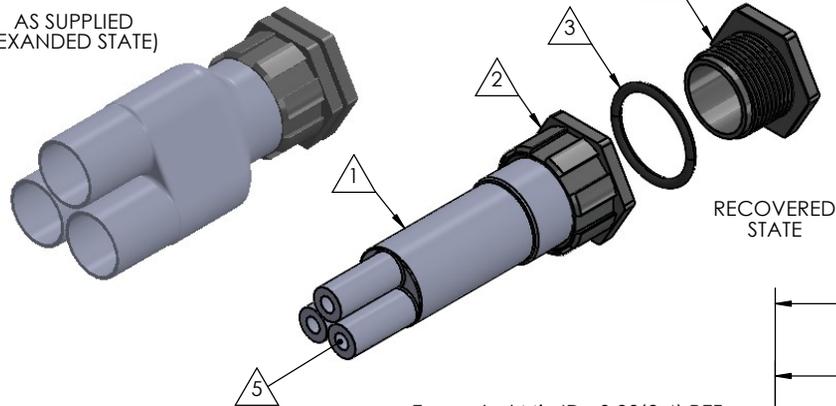


RECOVERED  
STATE

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	12/3/2025
B	REFINE DIMENSIONS AND DECIMAL PRECISION	12/16/2025
C	UPDATE TOLERANCE TABLE	12/30/2025


NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:  
ASSEMBLY MAY BE INSTALLED IN PANELS FROM  
0.08"(2.0mm) - 0.49"(12.4mm).  
RECCOMENDED DRILL HOLE DIAMETER  
OF 1.38" (34.9mm)

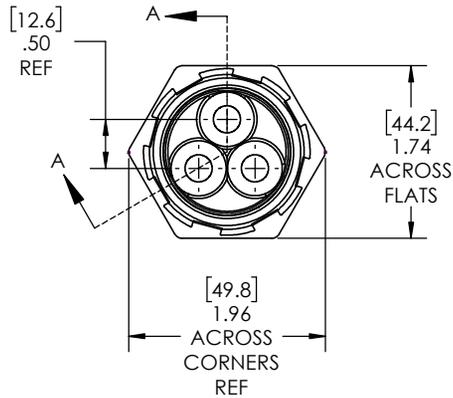

Expanded Min ID= 0.98(2.4) REF  
[Recovered Max ID= 0.30(7.6)] REF

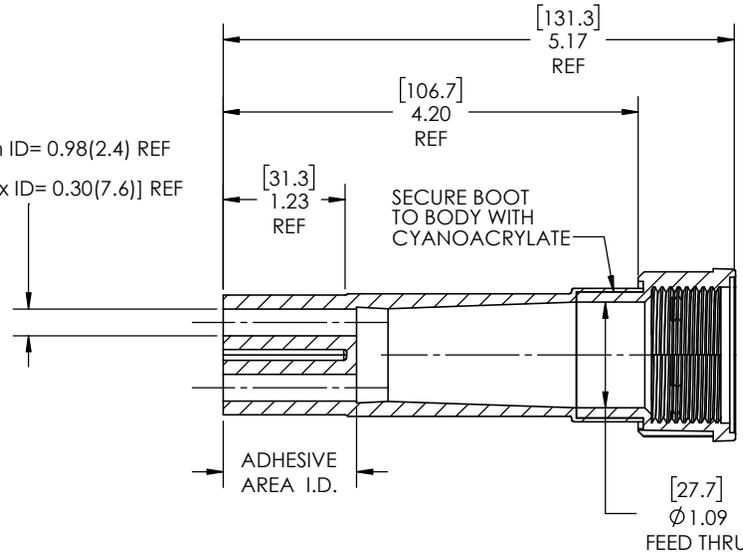

SECTION A-A  
RECOVERED  
SCALE 1 : 1.25

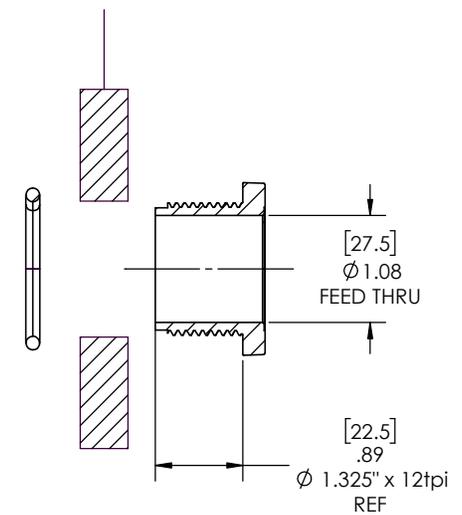

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	Heat-shrinkable boot	NUBB3-3	Flame Retardant Polyolefin
2	Body	S-3B	Glass Fiber Reinforced, PBT
3	O-ring	AS-220	Buna
4	Nut	S-3N	Glass Fiber Reinforced, PBT
5	Adhesive		Hotmelt Polyamide

**NU-TECH**

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL ±1/32  
ONE DECIMAL PLACE ± 0.040  
TWO DECIMAL PLACE ± 0.025  
THREE DECIMAL PLACE ± 0.010

PART NO.  
**3-NUS-3C**

DWG. NO. 3-NUS-3C-ASSY

WEIGHT: 0.189

REV C

DO NOT SCALE DRAWING

DRAWN: MLJ DATE: 2/3/2026

SCALE: 1:1.25

SHEET 1 OF 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1