


8 7 6 5 4 3 2 1


AS SUPPLIED
(EXPANDED STATE)

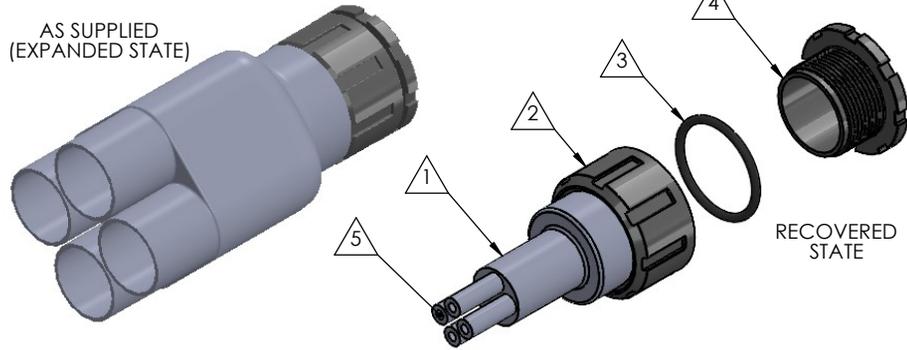


RECOVERED STATE

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	12/17/2025
B	UPDATE TOLERANCE TABLE AND DECIMAL PRECISION	12/30/2025

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:
ASSEMBLY MAY BE INSTALLED IN PANELS FROM
0.12"(3.1mm) - 0.48"(12.2mm).
RECOMMENDED DRILL HOLE DIAMETER
OF 1.65" (41.9mm)

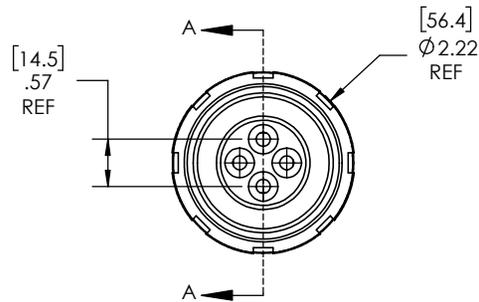

Expanded Min ID=0.85(21.6) REF
[Recovered Max ID=0.17(4.3)] REF

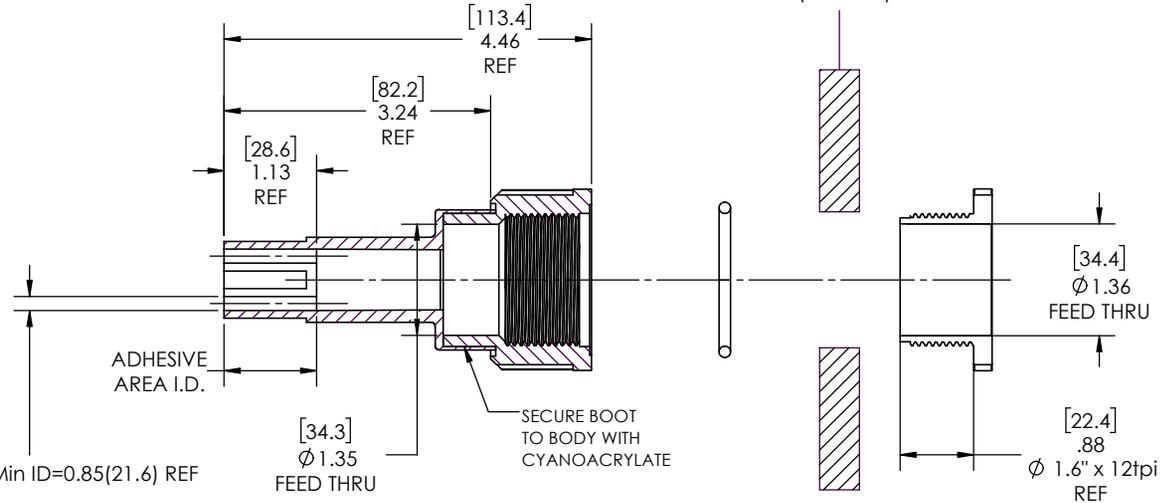

SECTION A-A
RECOVERED
SCALE 1 : 1.5

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	Heat-shrinkable boot	NUBB4-2	Flame Retardant Polyolefin
2	Body	S-3XB	Glass Fiber Reinforced, PBT
3	O-ring	AS-223	Buna
4	Nut	S-3XN	Glass Fiber Reinforced, PBT
5	Adhesive		Hotmelt Polyamide

NU-TECH

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/32
ONE DECIMAL PLACE ± 0.000
TWO DECIMAL PLACE ± 0.025
THREE DECIMAL PLACE ± 0.010

DO NOT SCALE DRAWING

DRAWN: MLJ DATE: 2/3/2026

PART NO.
3X-NUS-4B

DWG. NO. 3X-NUS-4B-ASSY

WEIGHT: 0.207

REV B

SCALE: 1:1.5

SHEET 1 OF 1

8 7 6 5 4 3 2 1