



8 7 6 5 4 3 2 1

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	12/18/2025
B	UPDATE TOLERANCE TABLE AND DECIMAL PRECISION	12/31/2025

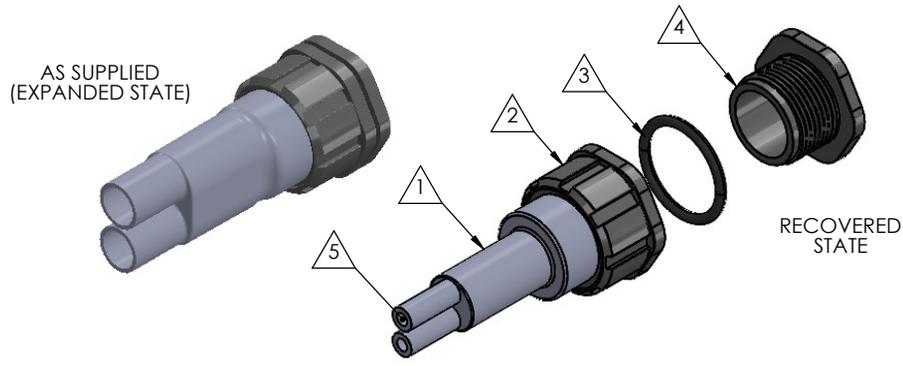

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:  
 ASSEMBLY MAY BE INSTALLED IN PANELS FROM  
 0.11"(2.8mm) - 0.63"(16.0mm).  
 RECOMMENDED DRILL HOLE DIAMETER  
 OF 2.00" (50.8mm)

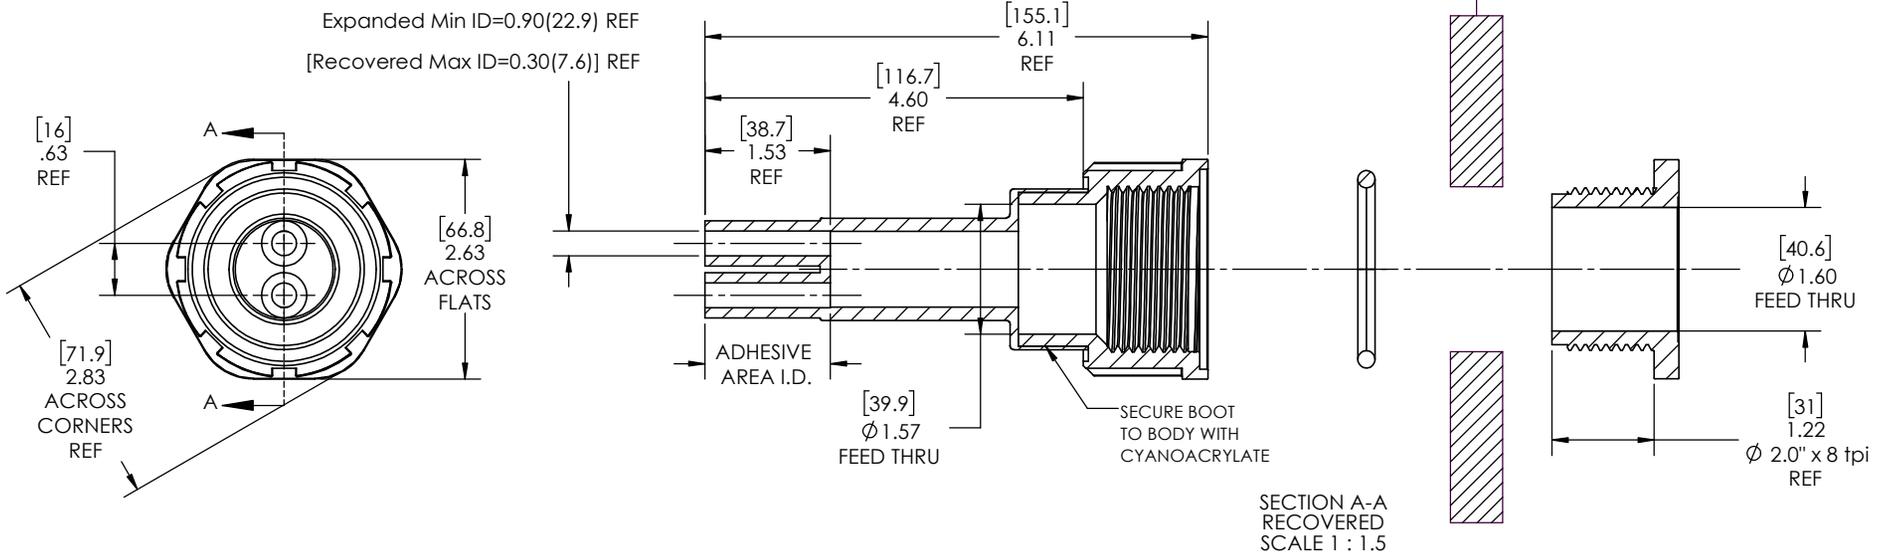

- NOTES:
- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
  - FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	Heat-shrinkable boot	NUBB2-3	Flame Retardant Polyolefin
2	Body	S-4B	Glass Fiber Reinforced, PBT
3	O-ring	AS-329	Buna
4	Nut	S-4N	Glass Fiber Reinforced, PBT
5	Adhesive		Hotmelt Polyamide

**NU-TECH**

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ±1/32 ONE DECIMAL PLACE ± 0.060 TWO DECIMAL PLACE ± 0.025 THREE DECIMAL PLACE ± 0.010 DO NOT SCALE DRAWING	PART NO.	
	<b>4-NUS-2C</b>	
	DWG. NO. <b>4-NUS-2C-ASSY</b>	
	WEIGHT: <b>0.394</b>	REV <b>B</b>
DRAWN: MLJ	DATE: 2/3/2026	SCALE: 1:1.5
		SHEET 1 OF 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1