


8 7 6 5 4 3 2 1


REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING, TOLERANCE TABLE AND DECIMAL PRECISION TO 2025 STANDARDS	12/31/2025

AS SUPPLIED
(EXPANDED STATE)

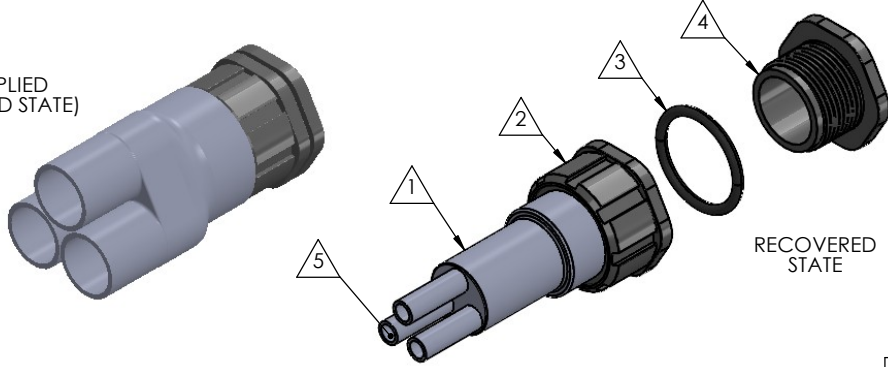


RECOVERED STATE


NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:
ASSEMBLY MAY BE INSTALLED IN PANELS FROM
0.11"(2.8mm) - 0.63"(16.0mm).
RECOMMENDED DRILL HOLE DIAMETER
OF 2.00" (50.8mm)

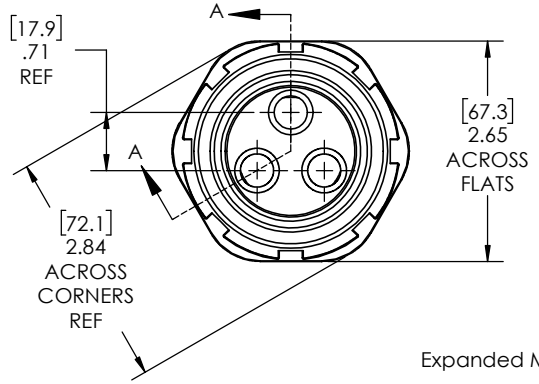

Expanded Min ID=1.25(31.8) REF
[Recovered Max ID=0.42(10.7)] REF

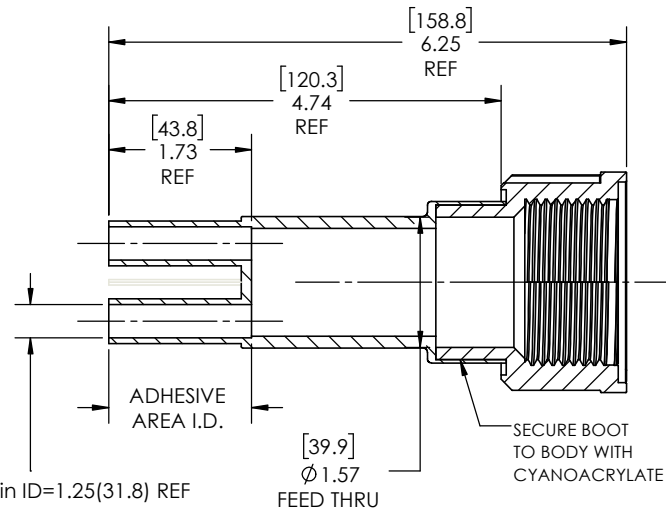

SECTION A-A
RECOVERED
SCALE 1 : 1.5

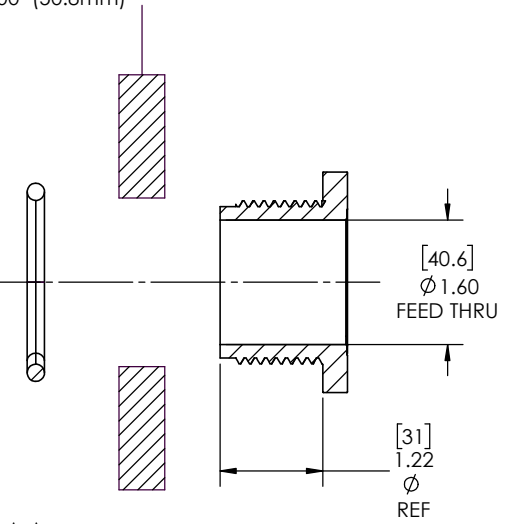

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	Heat-shrinkable boot	NUBB3-4	Flame Retardant Polyolefin
2	Body	S-4B	Glass Fiber Reinforced, PBT
3	O-ring	AS-329	Buna
4	Nut	S-4N	Glass Fiber Reinforced, PBT
5	Adhesive		Hotmelt Polyamide

NU-TECH

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/32 ONE DECIMAL PLACE ± 0.060 TWO DECIMAL PLACE ± 0.025 THREE DECIMAL PLACE ± 0.010 DO NOT SCALE DRAWING	PART NO.	4-NUS-3D	
	DWG. NO.	4-NUS-3D-ASSY	
	WEIGHT:	0.492	REV A
	DRAWN: MLJ	DATE: 2/3/2026	SCALE: 1:1.5

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

8 7 6 5 4 3 2 1