


8 7 6 5 4 3 2 1


REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS. UPDATE TOLERANCE TABLE AND DECIMAL PRECISION	1/6/2026

AS SUPPLIED
(EXPANDED STATE)

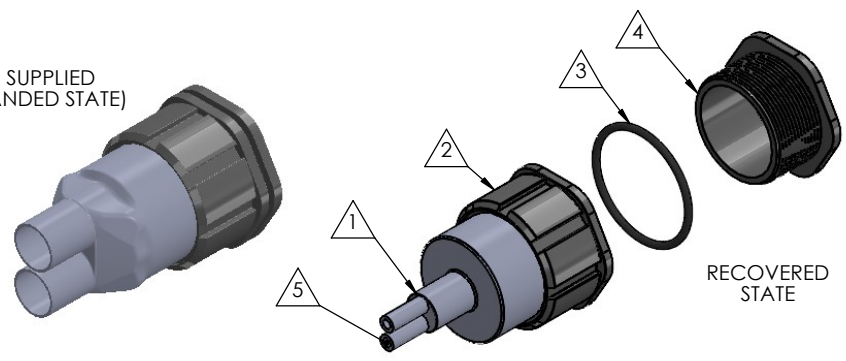

RECOVERED STATE

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:
ASSEMBLY MAY BE INSTALLED IN PANELS FROM
0.18" (4.4mm) - 0.88" (22.4mm).
RECCOMENDED DRILL HOLE DIAMETER
OF 3.50" (88.9mm)

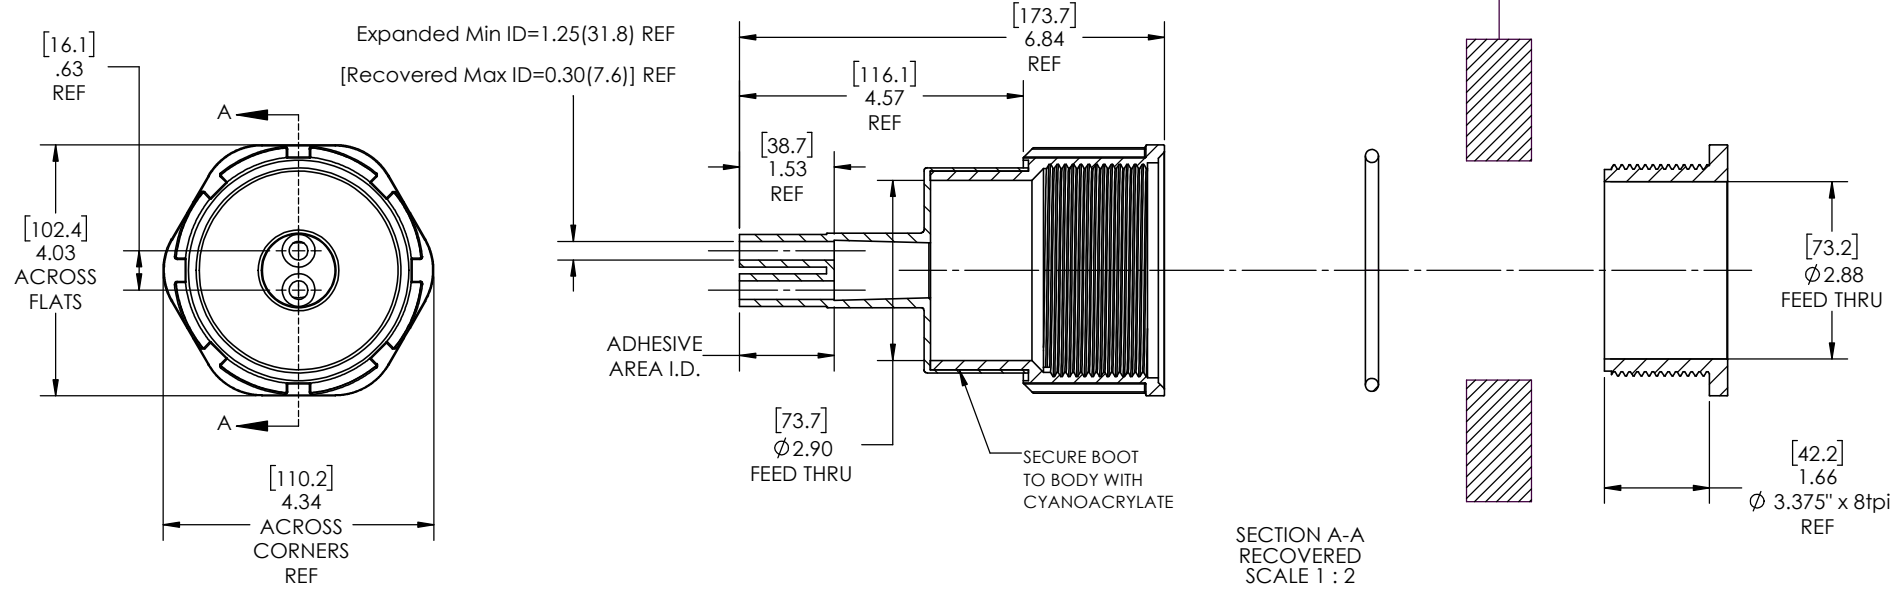

- NOTES:
- ITEM #1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
 - FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	Heat-shrinkable boot	NUBB2-4	Flame Retardant Polyolefin
2	Body	S-5B	Glass Fiber Reinforced, PBT
3	O-ring	AS-340	Buna
4	Nut	S-5N	Glass Fiber Reinforced, PBT
5	Adhesive		Hotmelt Polyamide

NU-TECH

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ±1/32 ONE DECIMAL PLACE ±0.060 TWO DECIMAL PLACE ±0.025 THREE DECIMAL PLACE ±0.010 DO NOT SCALE DRAWING	PART NO.	
	5-NUS-2D	
	DWG. NO. 5-NUS-2D-ASSY	
	WEIGHT: 0.844	REV A
DRAWN: MLJ	DATE: 2/3/2026	SCALE: 1:2
		SHEET 1 OF 1

8 7 6 5 4 3 2 1