


8 7 6 5 4 3 2 1


REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS. UPDATE TOLERANCE TABLE AND DECIMAL PRECISION	1/6/2026

AS SUPPLIED  
(EXPANDED STATE)

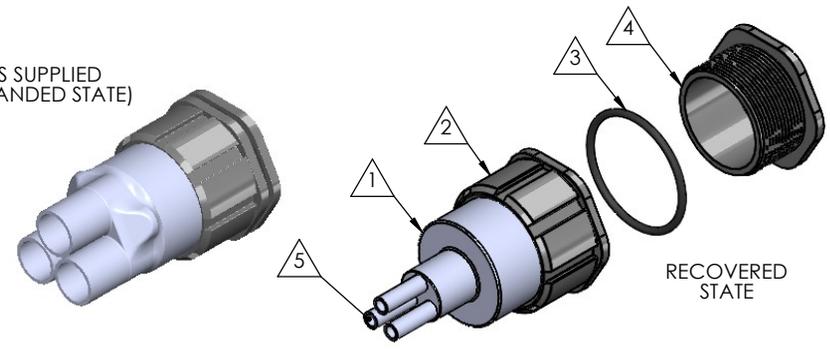

RECOVERED STATE

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:  
ASSEMBLY MAY BE INSTALLED IN PANELS FROM  
0.18"(4.4mm) - 0.88"(22.4mm).  
RECOMMENDED DRILL HOLE DIAMETER  
OF 3.50" (88.9mm)

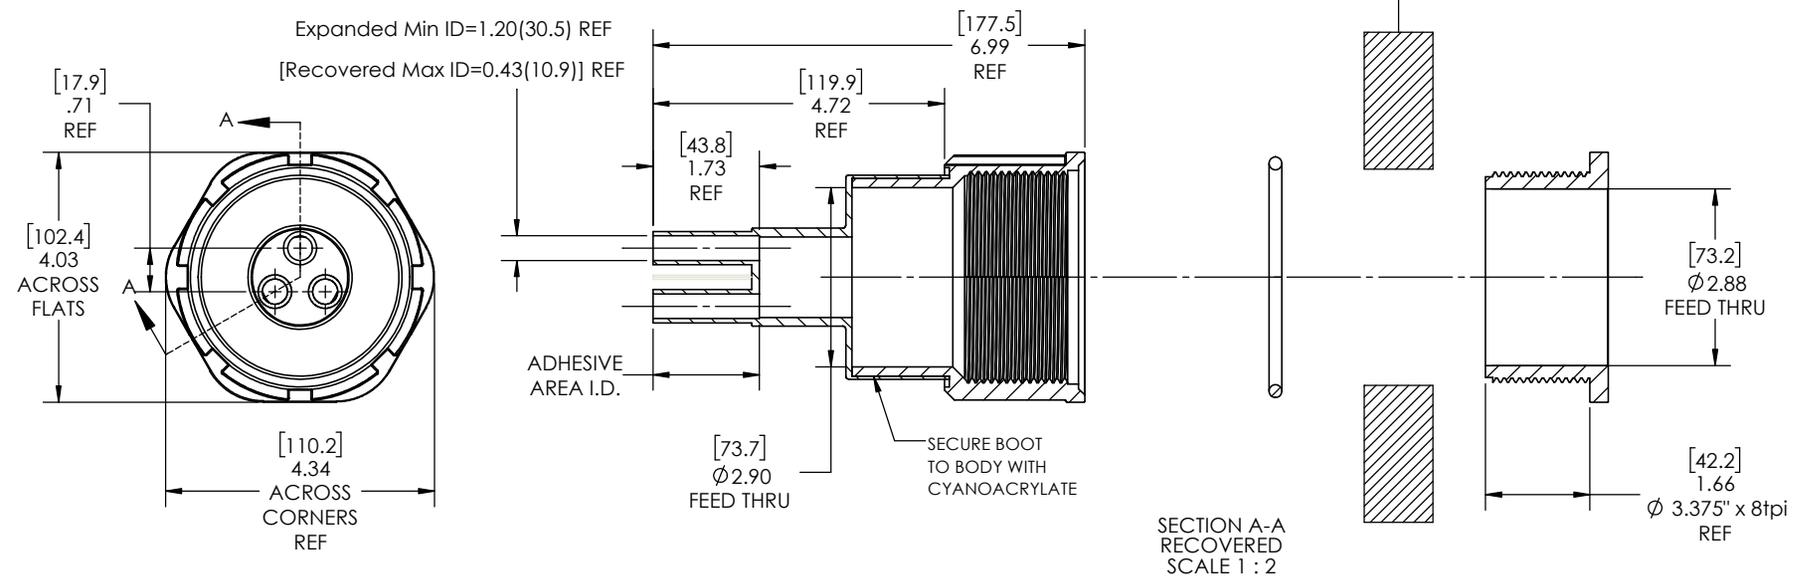

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	Heat-shrinkable boot	NUBB3-4	Flame Retardant Polyolefin
2	Body	S-5B	Glass Fiber Reinforced, PBT
3	O-ring	AS-340	Buna
4	Nut	S-5N	Glass Fiber Reinforced, PBT
5	Adhesive		Hotmelt Polyamide

**NU-TECH**

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ±1/32 ONE DECIMAL PLACE ± 0.060 TWO DECIMAL PLACE ± 0.025 THREE DECIMAL PLACE ± 0.010 DO NOT SCALE DRAWING	PART NO.	
	<b>5-NUS-3D</b>	
	DWG. NO. <b>5-NUS-3D-ASSY</b>	
	WEIGHT: <b>0.856</b>	REV <b>A</b>
DRAWN: MLJ	DATE: 3/13/2026	SCALE: <b>1:2</b>
		SHEET 1 OF 1

8 7 6 5 4 3 2 1