



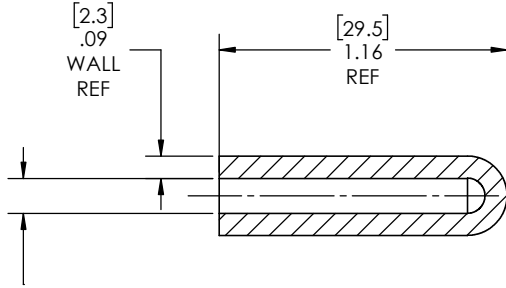


REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	2/18/2026




SECTION B-B
EXPANDED
SCALE 2:1

AS SUPPLIED
(EXPANDED STATE)



Expanded Min ID = 0.43(10.9) REF
[Recovered Max ID = 0.14(3.6)] REF

SECTION A-A
RECOVERED
SCALE 2:1



RECOVERED
STATE

NOTES:

- ITEM#1 - HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- ITEM#2 - FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD - INTERIOR SURFACES.

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	HEAT SHRINKABLE BOOT	USE 9/5mm SIZE	FLAME RETARDANT POLYOLEFIN
2	ADHESIVE		HOTMELT POLYAMIDE

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

NU-TECH

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/16
ONE DECIMAL PLACE ±0.200
TWO DECIMAL PLACE ±0.100
THREE DECIMAL PLACE ±0.050

PART DESC.	NU039X016
DWG. NO.	NU039X016
WEIGHT:	0.002
REV	A

DO NOT SCALE DRAWING

DRAWN: MLJ	DATE: 2/19/2026	SCALE: 2:1	SHEET 1 OF 1
------------	-----------------	------------	--------------