

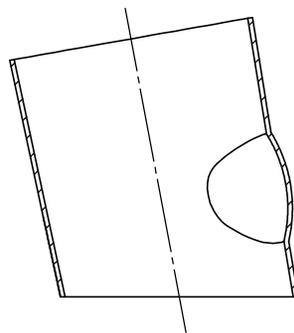


8 7 6 5 4 3 2 1


REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	2/27/2026

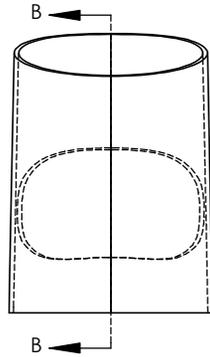


SECTION B-B
EXPANDED
SCALE 2 : 1.75

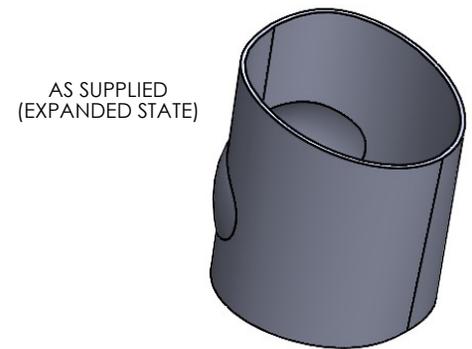


AS SUPPLIED
(EXPANDED STATE)

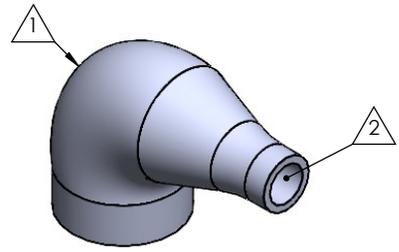

RECOVERED
STATE

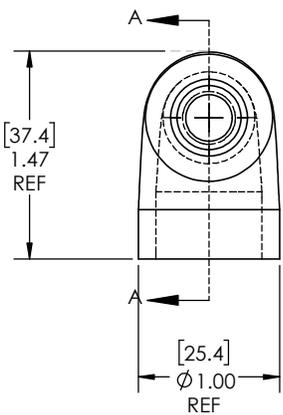

Expanded Min ID= 1.50(38.1) REF
[Recovered Max ID = 0.33(8.4)] REF

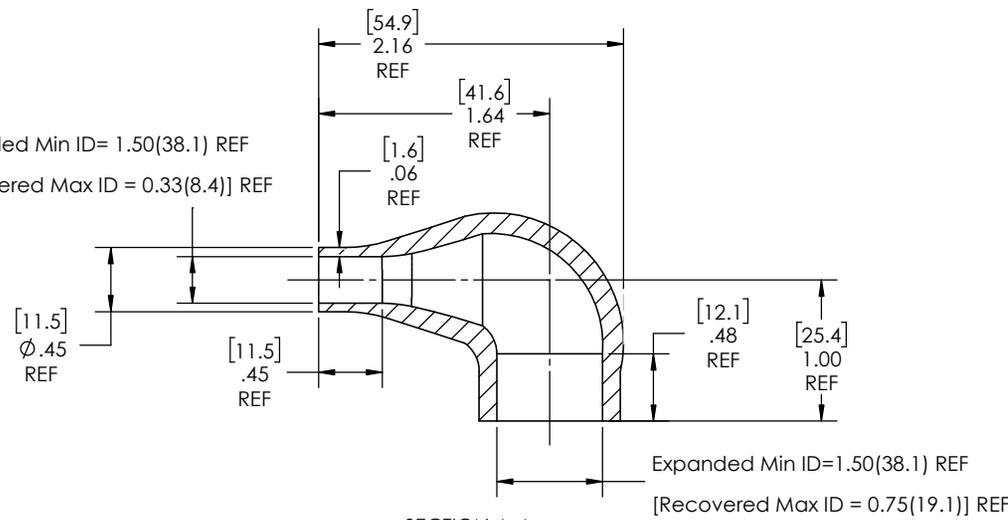

SECTION A-A
RECOVERED
SCALE 2 : 1.75

Expanded Min ID=1.50(38.1) REF
[Recovered Max ID = 0.75(19.1)] REF

NOTES:

- ITEM#1 - HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- ITEM#2 - FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD - INTERIOR SURFACES.
- ITEM #3 - BOOTS INTENDED FOR NU-TECH ASSEMBLIES WILL HAVE HOTMELT APPLIED INSIDE LEGS ONLY AFTER ASSEMBLY HAS BEEN COMPLETED.

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
①	HEAT SHRINKABLE BOOT	M-NU2RL	FLAME RETARDANT POLYOLEFIN
②	ADHESIVE		HOTMELT POLYAMIDE

NU-TECH

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/16
ONE DECIMAL PLACE ± 0.200
TWO DECIMAL PLACE ± 0.100
THREE DECIMAL PLACE ± 0.050

PART DESC.	
NU2R	
DWG. NO.	NU2R
WEIGHT:	0.0246
REV	A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

Without Lip|NU2R| NU2R DO NOT SCALE DRAWING

DRAWN: MLJ DATE: 3/26/2026 SCALE: 2:1.75 SHEET 1 OF 1

8 7 6 5 4 3 2 1