



8 7 6 5 4 3 2 1

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	10/22/2025
B	UPDATE TOLERANCE TABLE	1/13/2026
C	ADJUST EXPANDED REFERENCE LENGTH TO REFLECT ACTUAL EXPANDED STATE PART SAMPLES	3/5/2026


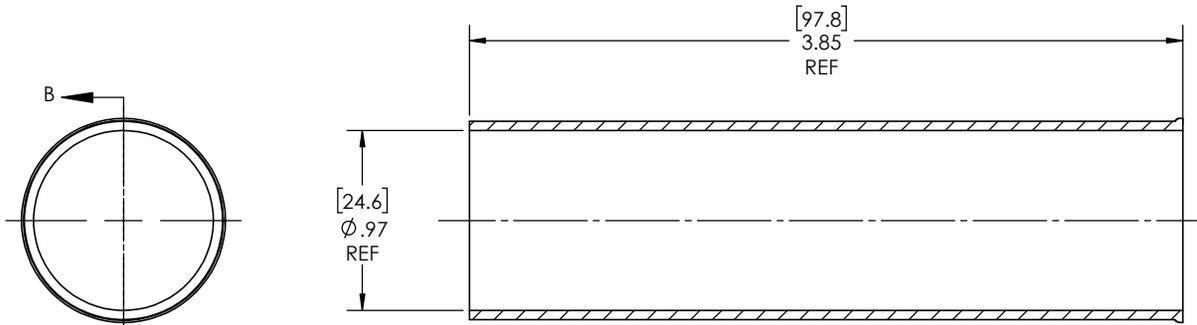


SECTION B-B  
EXPANDED  
SCALE 1.5 : 1

AS SUPPLIED  
(EXPANDED STATE)

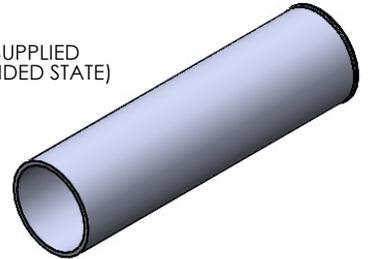

RECOVERED  
STATE

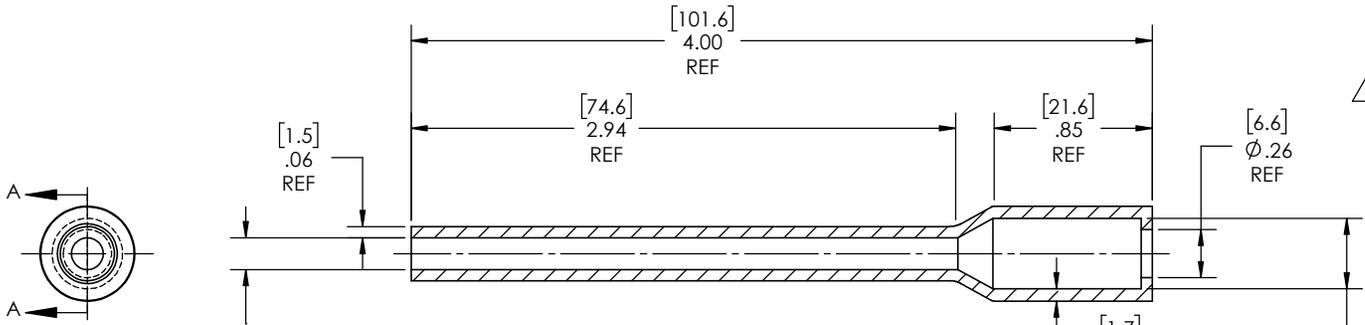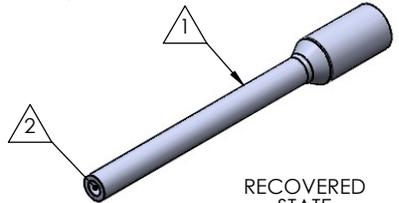

SECTION A-A  
RECOVERED  
SCALE 1.5 : 1

Expanded Min ID= 0.97(24.6) REF  
[Recovered Max ID= 0.17(4.4)] REF

Expanded Min ID= 0.97(24.6) REF  
[Recovered Max ID= 0.38(9.7)] REF

NOTES:

- ITEM#1 - HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- ITEM#2 - FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD - INTERIOR SURFACES.

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
①	HEAT SHRINKABLE BOOT	M-NUCS424A	FLAME RETARDANT POLYOLEFIN
②	ADHESIVE		HOTMELT POLYAMIDE

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

**NU-TECH**

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/16 ONE DECIMAL PLACE ± 0.200 TWO DECIMAL PLACE ± 0.100 THREE DECIMAL PLACE ± 0.050	PART DESC. <b>NUCS424A</b>
DWG. NO. <b>NUCS424A</b>	REV <b>C</b>
WEIGHT: <b>0.0056</b>	SCALE: <b>1.5:1</b>
DRAWN: MLJ DATE: 3/24/2026	SHEET 1 OF 1

Q:\Nu-Tech Engineering\Nu-Tech - Products and Components 2025\Parts and Drawings\Transition Boots\Transition Boots with lip\NUCS424A\NUCS424A DO NOT SCALE DRAWING

8 7 6 5 4 3 2 1