

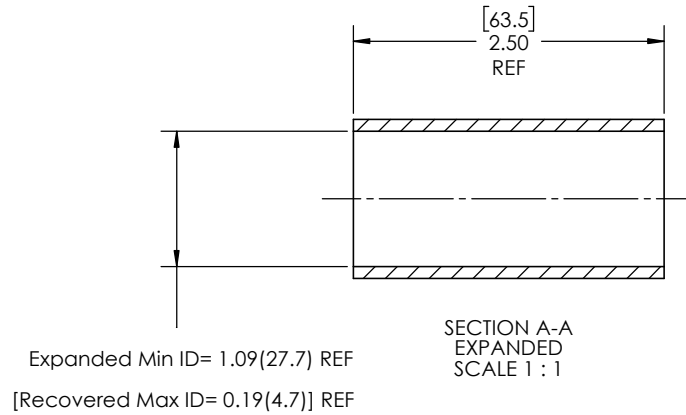


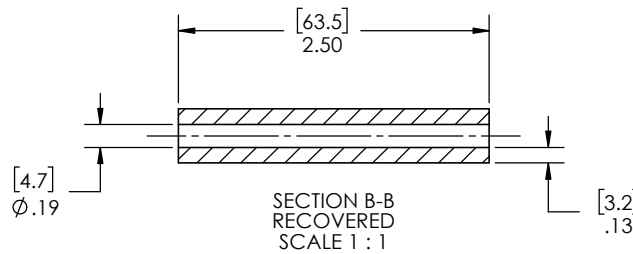


REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	11/5/2025
B	UPDATE TOLERANCE TABLE	1/13/2026



AS SUPPLIED
(EXPANDED STATE)

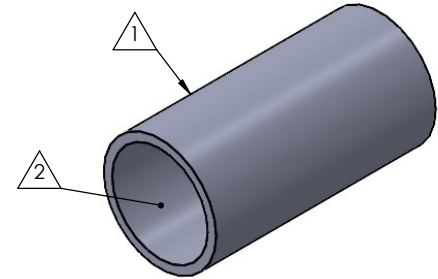

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- ITEM#2 FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.</p>	<p>USE MOLDED PART: M-NUHRT-.185X2.5LG (.185" HIGH RATIO TUBE)</p>	<p>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ±1/16 ONE DECIMAL PLACE ± 0.200 TWO DECIMAL PLACE ± 0.100 THREE DECIMAL PLACE ± 0.050</p>	<p>PART DESC. NUHRT-.185X2.5LG</p>	
	<p>MATERIAL: Flame Retardant Polyolefin</p> <p>FINISH: -</p>		<p>DWG. NO. NUHRT-.185X2.5LG</p>	
	<p>DO NOT SCALE DRAWING</p>	<p>DRAWN: MLJ DATE: 2/4/2026</p>	<p>WEIGHT: 0.010</p>	<p>REV B</p>
		<p>SCALE: 1:1</p>	<p>SHEET 1 OF 1</p>	