
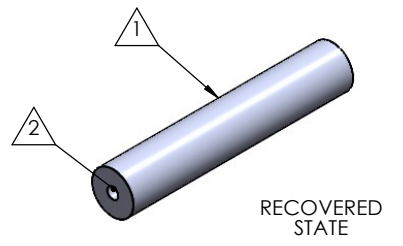
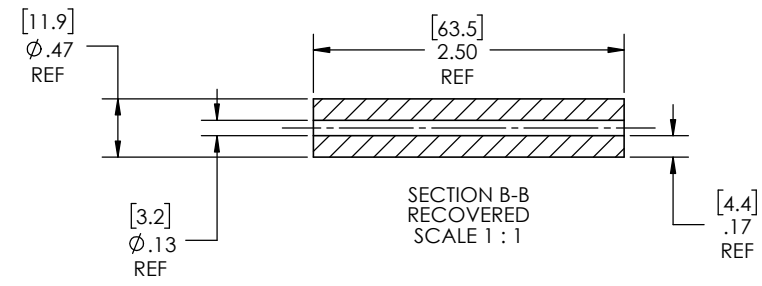

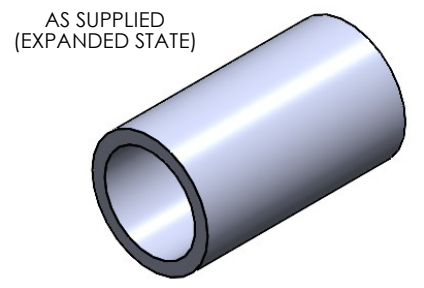
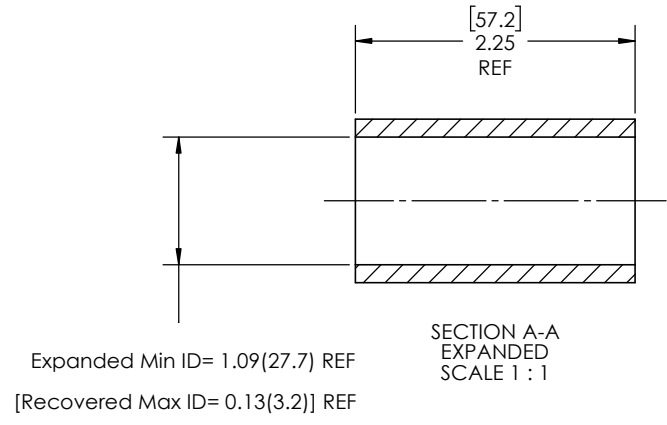


REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	11/5/2025
B	UPDATE TOLERANCE TABLE	1/13/2026
C	REVISE RECOVERED ID TO 0.13". WAS 0.19". REVISE OD TO .47" AS TO MATCH NUHRT .75" BASE STOCK	6/1/2026



- NOTES:
- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
 - ITEM#2 FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

USE MOLDED PART:
M-NUHRT-.75
(.125" HIGH RATIO TUBE)

MATERIAL:
Flame Retardant Polyolefin

FINISH:
-

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/16
ONE DECIMAL PLACE ± 0.200
TWO DECIMAL PLACE ± 0.100
THREE DECIMAL PLACE ± 0.050

PART DESC.
NUHRT-.185X2.5LG

DWG. NO. NUHRT-.185X2.5LG

WEIGHT: 0.013

SCALE: 1:1

REV C