
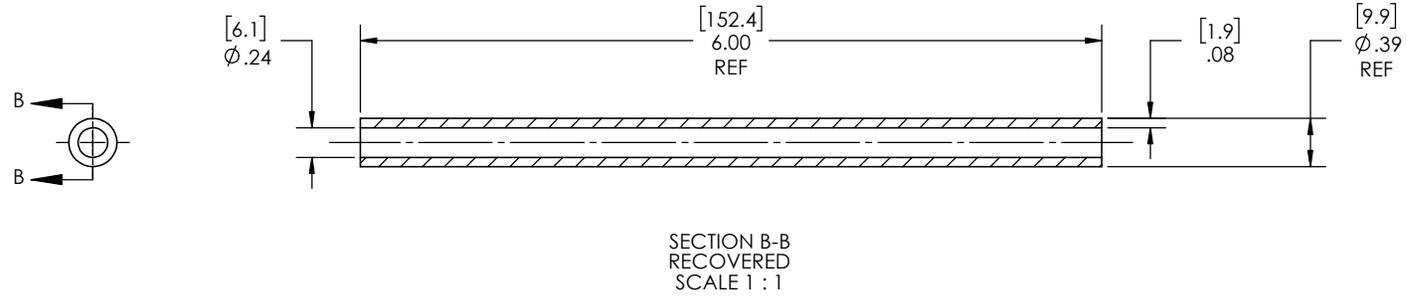
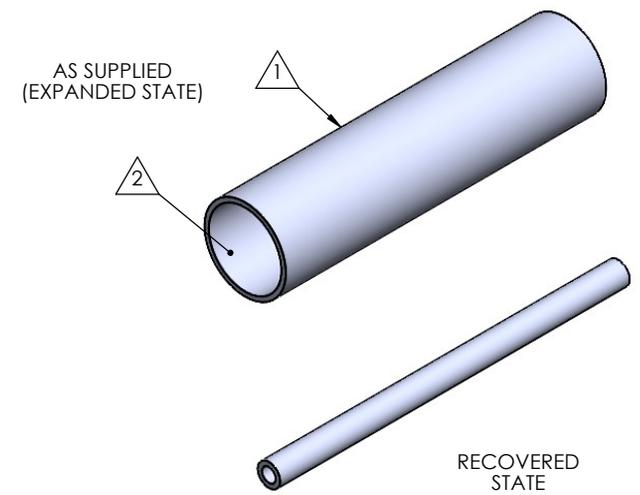


8 7 6 5 4 3 2 1

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	11/3/2025
B	UPDATE TOLERANCE TABLE	1/13/2026

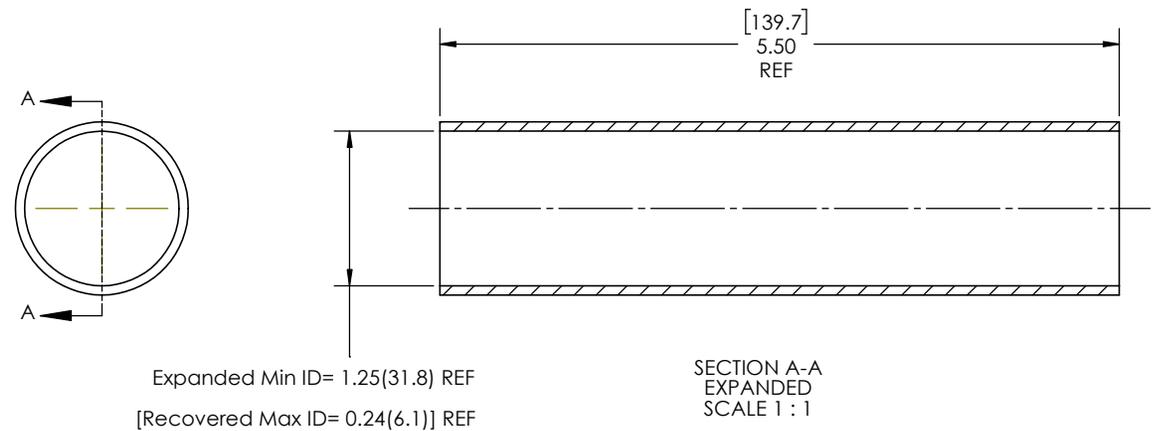

- NOTES:
- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
 - ITEM#2 FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

USE MOLDED PART:
 M-NUHRT-.240-1.25
 (.240" HIGH RATIO TUBE)
 MATERIAL:
 Flame Retardant Polyolefin
 FINISH:
 -

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL ±1/16
 ONE DECIMAL PLACE ± 0.200
 TWO DECIMAL PLACE ± 0.100
 THREE DECIMAL PLACE ± 0.050

PART DESC.
NUHRT-.240-1.25
 (ALT# - NUHRHF125-1.5X6)
 DWG. NO.
 NUHRT-.240-1.25
 WEIGHT:
 0.057
 REV B

NU-TECH

8 7 6 5 4 3 2 1