




8 7 6 5 4 3 2 1

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	11/5/2025
B	UPDATE TOLERANCE TABLE	1/13/2026

Expanded Min ID= 1.50(38.1) REF
 [Recovered Max ID= 0.32(8.1)] REF

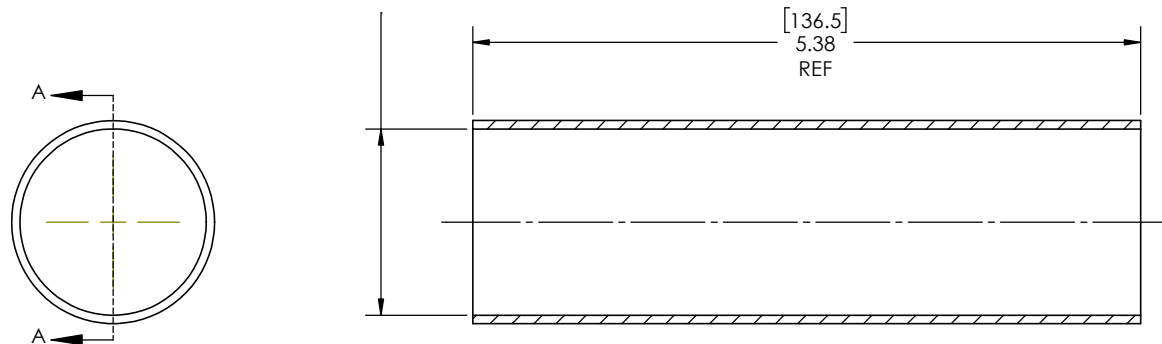

SECTION A-A
 EXPANDED
 SCALE 1 : 1

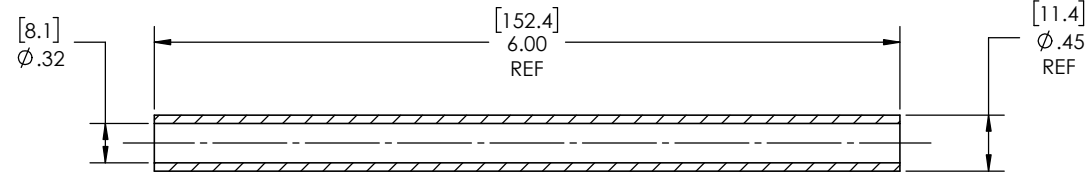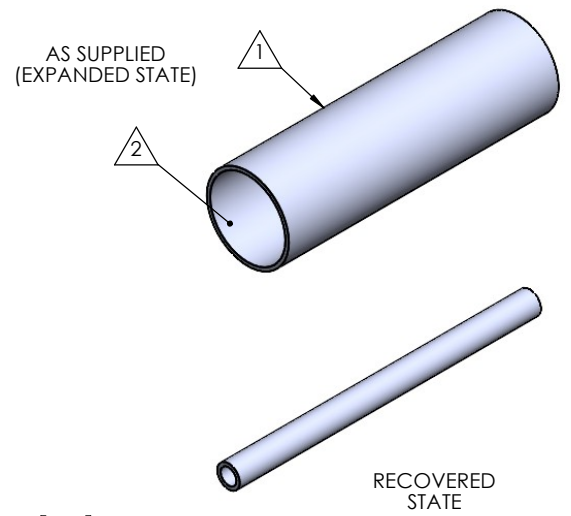

SECTION B-B
 RECOVERED
 SCALE 1 : 1

- NOTES:
- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
 - ITEM#2 FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

USE MOLDED PART:
 M-NUHRT-.317-1.75
 MATERIAL:
 Flame Retardant Polyolefin
 FINISH:
 -
 DO NOT SCALE DRAWING

NU-TECH

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ±1/16 ONE DECIMAL PLACE ± 0.200 TWO DECIMAL PLACE ± 0.100 THREE DECIMAL PLACE ± 0.050	PART DESC. NUHRT-.317-1.5X6
DWG. NO. NUHRT-.317-1.5X6	WEIGHT: 0.059
DATE: 3/30/2026	SCALE: 1:1
DRAWN: MLJ	REV B
	SHEET 1 OF 1

8 7 6 5 4 3 2 1