

8 7 6 5 4 3 2 1

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	11/10/2025
B	UPDATE TOLERANCE TABLE	1/13/2026
C	CHANGE RECOVERED TO EXPANDED IN COLUMN 3	3/17/2026

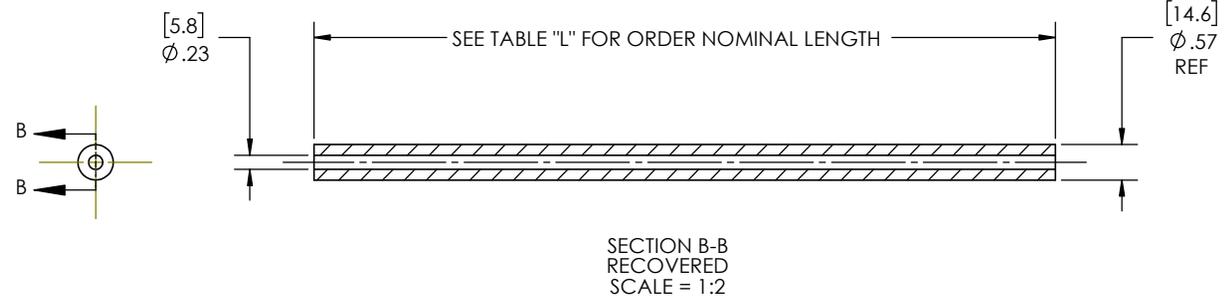
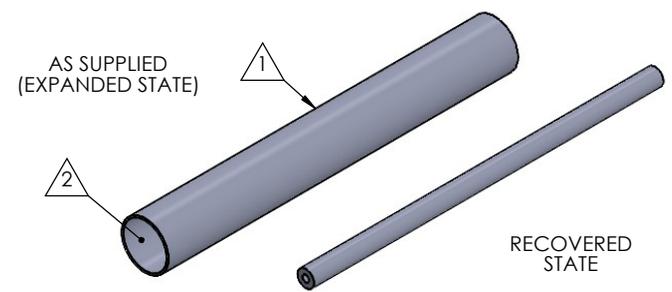
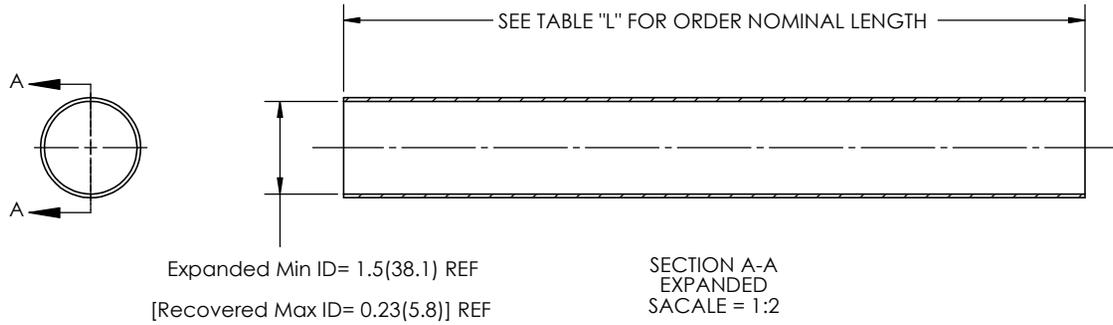


TABLE "L"  
SPECIFY FINISHED LENGTH REQUIRED FOR ORDER

NU-TECH PART NO.	COMMON PART NO.	NOMINAL/EXPANDED LENGTH	TRIM LENGTH
NUHRT-1.5/.50	91385-2/.50	0.5" (12.7mm)	1.00
NUHRT-1.5/1	91385-2/1	1" (25.4mm)	1.50
NUHRT-1.5/2	91385-2/2	2" (50.8mm)	2.50
NUHRT-1.5/3	91385-2/3	3" (76.2mm)	3.50
NUHRT-1.5/4	91385-2/4	4" (101.6mm)	4.50
NUHRT-1.5/5	91385-2/5	5" (127.0mm)	5.50
NUHRT-1.5/6	91385-2/6	6" (152.4mm)	6.50
NUHRT-1.5/7	91385-2/7	7" (177.8mm)	7.50
NUHRT-1.5/8	91385-2/8	8" (203.2mm)	8.50
NUHRT-1.5/9	91385-2/9	9" (228.6mm)	9.50
NUHRT-1.5/10	91385-2/10	10" (254.0mm)	10.50
NUHRT-1.5/11	91385-2/11	11" (279.4mm)	11.50
NUHRT-1.5/12	91385-2/12	12" (304.8mm)	12.50
NUHRT-1.5/S	91385-2/S	SPECIAL LENGTH	NOM + .50

- NOTES:
- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
  - ITEM#2 FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

<p><b>PROPRIETARY AND CONFIDENTIAL</b></p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.</p>	<p>USE MOLDED PART:</p> <p>M-.25 HIGH RATIO TUBE</p>	<p>UNLESS OTHERWISE SPECIFIED: PART DESC.</p> <p>NUHRT-1.5 (91385-2)</p>
	<p>MATERIAL:</p> <p>Flame Retardant Polyolefin</p>	
	<p>FINISH:</p> <p>-</p>	<p>DWG. NO. 91385-2</p> <p>WEIGHT: 0.086</p> <p>REV C</p>
<p>DO NOT SCALE DRAWING</p>	<p>DRAWN: MLJ</p> <p>DATE: 3/17/2026</p>	<p>SCALE: 1:2</p> <p>SHEET 1 OF 1</p>

8 7 6 5 4 3 2 1