


REVISIONS

REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	11/10/2025
B	UPDATE TOLERANCE TABLE	1/13/2026
C	CHANGE RECOVERED TO EXPANDED IN COLUMN 3	3/17/2026

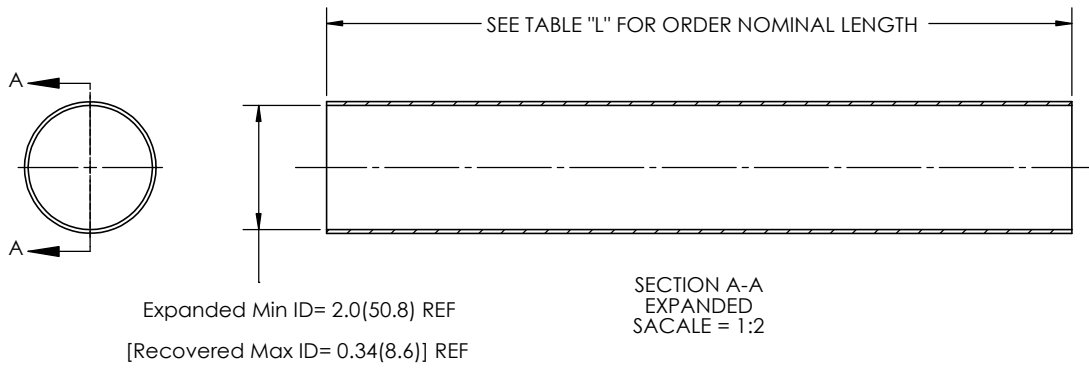

SECTION A-A
EXPANDED
SCALE = 1:2


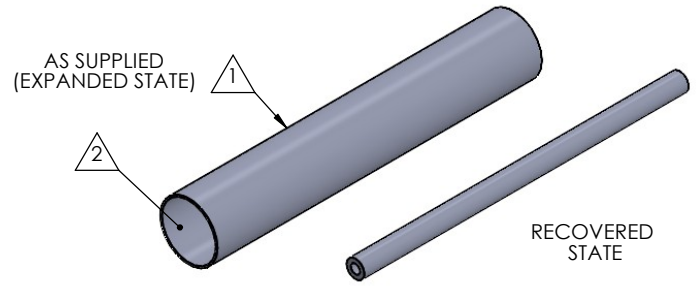


TABLE "L"
SPECIFY FINISHED LENGTH REQUIRED FOR ORDER

NU-TECH PART NO.	COMMON PART NO.	NOMINAL / EXPANDED LENGTH	TRIM LENGTH
NUHRT-2/.50	91385-3/.50	0.5" (12.7mm)	1.00
NUHRT-2/1	91385-3/1	1" (25.4mm)	1.50
NUHRT-2/2	91385-3/2	2" (50.8mm)	2.50
NUHRT-2/3	91385-3/3	3" (76.2mm)	3.50
NUHRT-2/4	91385-3/4	4" (101.6mm)	4.50
NUHRT-2/5	91385-3/5	5" (127.0mm)	5.50
NUHRT-2/6	91385-3/6	6" (152.4mm)	6.50
NUHRT-2/7	91385-3/7	7" (177.8mm)	7.50
NUHRT-2/8	91385-3/8	8" (203.2mm)	8.50
NUHRT-2/9	91385-3/9	9" (228.6mm)	9.50
NUHRT-2/10	91385-3/10	10" (254.0mm)	10.50
NUHRT-2/11	91385-3/11	11" (279.4mm)	11.50
NUHRT-2/12	91385-3/12	12" (304.8mm)	12.42
NUHRT-2/S	91385-3/S	SPECIAL LENGTH	NOM+.50

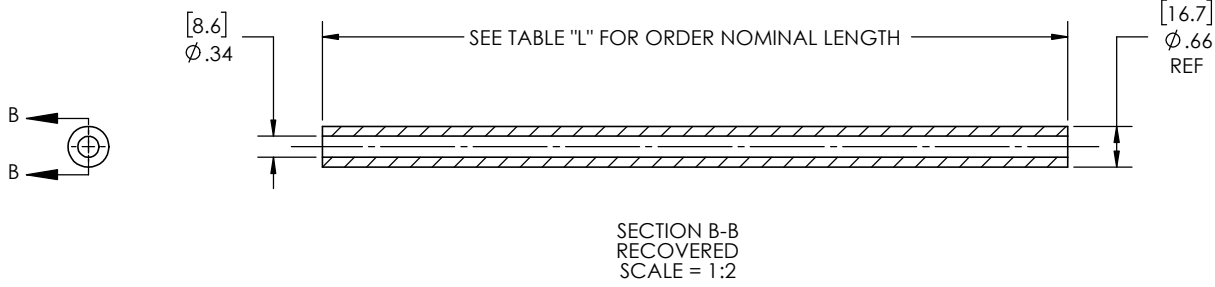

SECTION B-B
RECOVERED
SCALE = 1:2

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- ITEM#2 FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.</p>	<p>USE MOLDED PART: M-.375 HIGH RATIO TUBE</p>	<p>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ±1/16 ONE DECIMAL PLACE ± 0.200 TWO DECIMAL PLACE ± 0.100 THREE DECIMAL PLACE ± 0.050</p>	<p>PART DESC. NUHRT-2 (91385-3)</p>	
	<p>MATERIAL: Flame Retardant Polyolefin</p>		<p>DWG. NO. 91385-3</p>	
	<p>FINISH: -</p>	<p>DO NOT SCALE DRAWING</p>	<p>DRAWN: MLJ DATE: 3/17/2026</p>	<p>WEIGHT: 0.099</p>

NU-TECH