


8 7 6 5 4 3 2 1

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	11/10/2025
B	UPDATE TOLERANCE TABLE	1/13/2026
C	CHANGE RECOVERED TO EXPANDED IN COLUMN 3	3/17/2026

Expanded Min ID= 3.50(88.9) REF
 [Recovered Max ID= 0.75(19.1)] REF

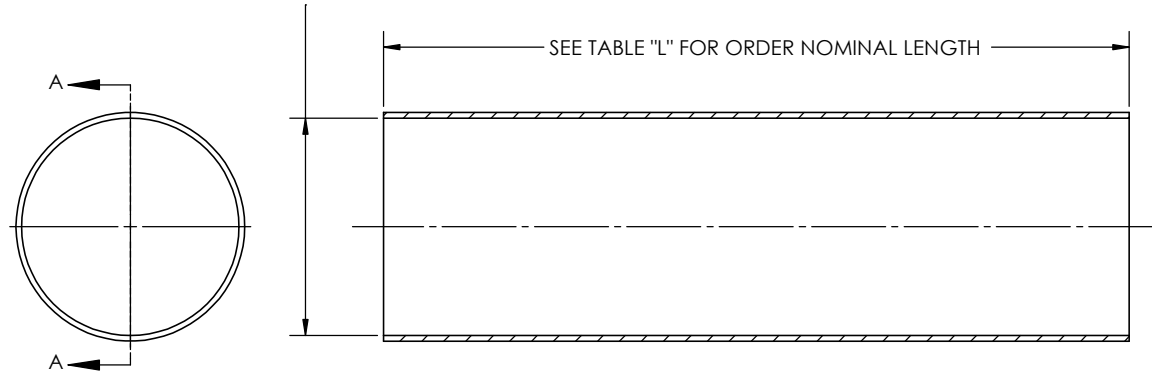

SECTION A-A
 EXPANDED
 SCALE = 1:2


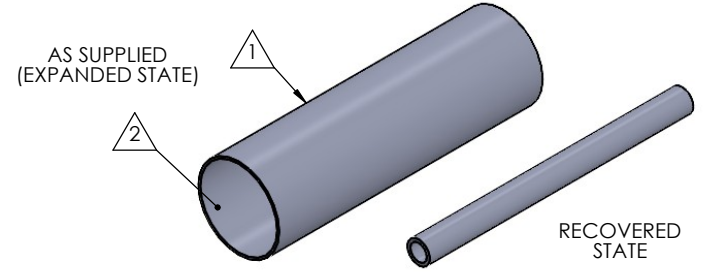


TABLE "L"
 SPECIFY FINISHED LENGTH REQUIRED FOR ORDER

NU-TECH PART NO.	COMMON PART NO.	NOMINAL / EXPANDED LENGTH	TRIM LENGTH
NUHRT-3.5/.50	91385-5/.50	0.5" (12.7mm)	1.50
NUHRT-3.5/1	91385-5/1	1" (25.4mm)	2.00
NUHRT-3.5/2	91385-5/2	2" (50.8mm)	3.00
NUHRT-3.5/3	91385-5/3	3" (76.2mm)	4.00
NUHRT-3.5/4	91385-5/4	4" (101.6mm)	5.00
NUHRT-3.5/5	91385-5/5	5" (127.0mm)	6.00
NUHRT-3.5/6	91385-5/6	6" (152.4mm)	7.00
NUHRT-3.5/7	91385-5/7	7" (177.8mm)	8.00
NUHRT-3.5/8	91385-5/8	8" (203.2mm)	9.00
NUHRT-3.5/9	91385-5/9	9" (228.6mm)	10.00
NUHRT-3.5/10	91385-5/10	10" (254.0mm)	11.00
NUHRT-3.5/11	91385-5/11	11" (279.4mm)	12.00
NUHRT-3.5/12	91385-5/12	12" (304.8mm)	12.49
NUHRT-3.5/S	91385-5/S	SPECIAL LENGTH	NOM+1.00

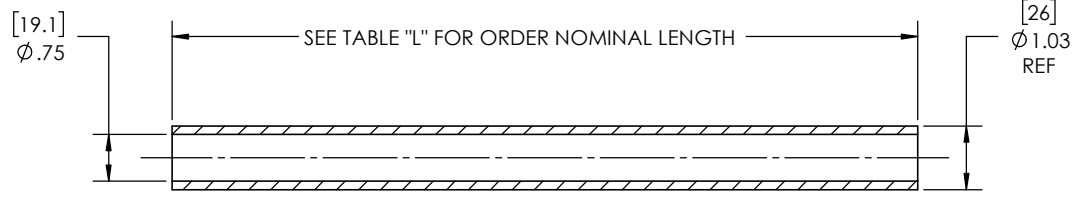

SECTION B-B
 RECOVERED
 SCALE = 1:2

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- ITEM#2 FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.</p>	<p>USE MOLDED PART:</p> <p>M-.750 HIGH RATIO TUBE</p>	<p>UNLESS OTHERWISE SPECIFIED: PART DESC.</p> <p>NUHRT-3.5 (91385-5)</p>
	<p>MATERIAL:</p> <p>Flame Retardant Polyolefin</p>	
	<p>FINISH:</p> <p>-</p>	<p>DO NOT SCALE DRAWING</p>

DRAWN: MLJ DATE: 3/17/2026 REV C SHEET 1 OF 1

8 7 6 5 4 3 2 1