
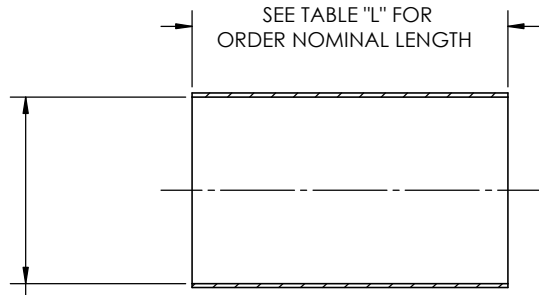


8 7 6 5 4 3 2 1


REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	11/10/2025
B	UPDATE TOLERANCE TABLE	1/13/2026
C	CHANGE RECOVERED TO EXPANDED IN COLUMN 3	3/17/2026

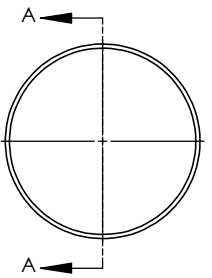

Expanded Min ID= 4.5(114.3) REF  
[Recovered Max ID= 1.50(38.1)] REF

SECTION A-A  
EXPANDED  
SCALE 1 : 3



AS SUPPLIED  
(EXPANDED STATE)

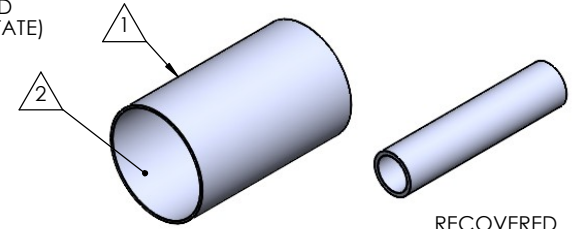

RECOVERED  
STATE

TABLE "L"  
SPECIFY FINISHED LENGTH REQUIRED FOR ORDER

NU-TECH PART NO.	COMMON PART NO.	NOMINAL / EXPANDED LENGTH	TRIM LENGTH
NUHRT-4.5/.50	-	0.5" (12.7mm)	2.00
NUHRT-4.5/1	-	1" (25.4mm)	2.50
NUHRT-4.5/2	-	2" (50.8mm)	3.50
NUHRT-4.5/3	-	3" (76.2mm)	4.50
NUHRT-4.5/4	-	4" (101.6mm)	5.50
NUHRT-4.5/5	-	5" (127.0mm)	6.50
NUHRT-4.5/6	-	6" (152.4mm)	7.50
NUHRT-4.5/7	-	7" (177.8mm)	8.50
NUHRT-4.5/8	-	8" (203.2mm)	9.50
NUHRT-4.5/9	-	9" (228.6mm)	10.50
NUHRT-4.5/10	-	10" (254.0mm)	11.50
NUHRT-4.5/11	-	11" (279.4mm)	12.50
NUHRT-4.5/12	-	12" (304.8mm)	12.94
NUHRT-4.5/S	-	SPECIAL LENGTH	NOM+1.50

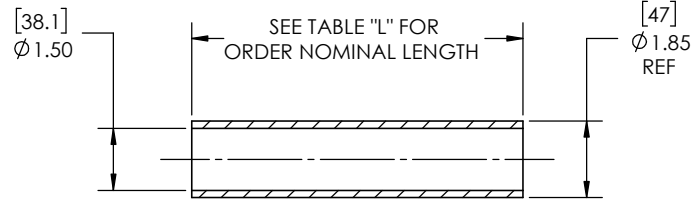

SECTION B-B  
RECOVERED  
SCALE 1 : 3

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- ITEM#2 FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

USE MOLDED PART:  
**M-1.50-12.94 HRT OR  
M-1.50-8.38 HRT**  
MATERIAL:  
Flame Retardant Polyolefin  
FINISH:  
-

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL ±1/16  
ONE DECIMAL PLACE ± 0.200  
TWO DECIMAL PLACE ± 0.100  
THREE DECIMAL PLACE ± 0.050

PART DESC. <b>NUHRT-4.5</b>	
DWG. NO. <b>NUHRT-4.5</b>	REV <b>C</b>
WEIGHT: <b>0.365</b>	
SCALE: <b>1:3</b>	SHEET 1 OF 1

8 7 6 5 4 3 2 1