





REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	11/204/2025
B	UPDATE DECIMAL PRECISION AND TOLERANCE TABLE	12/29/2025

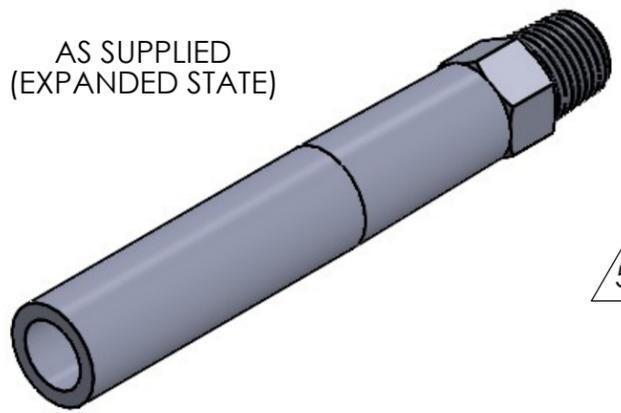

AS SUPPLIED
(EXPANDED STATE)

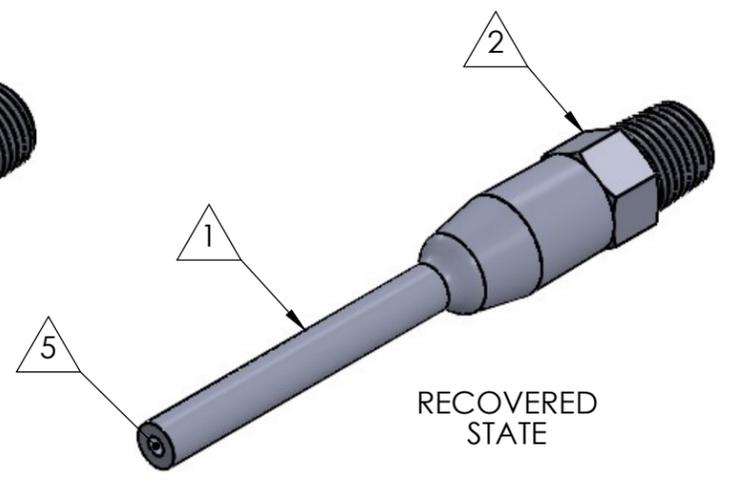

RECOVERED
STATE

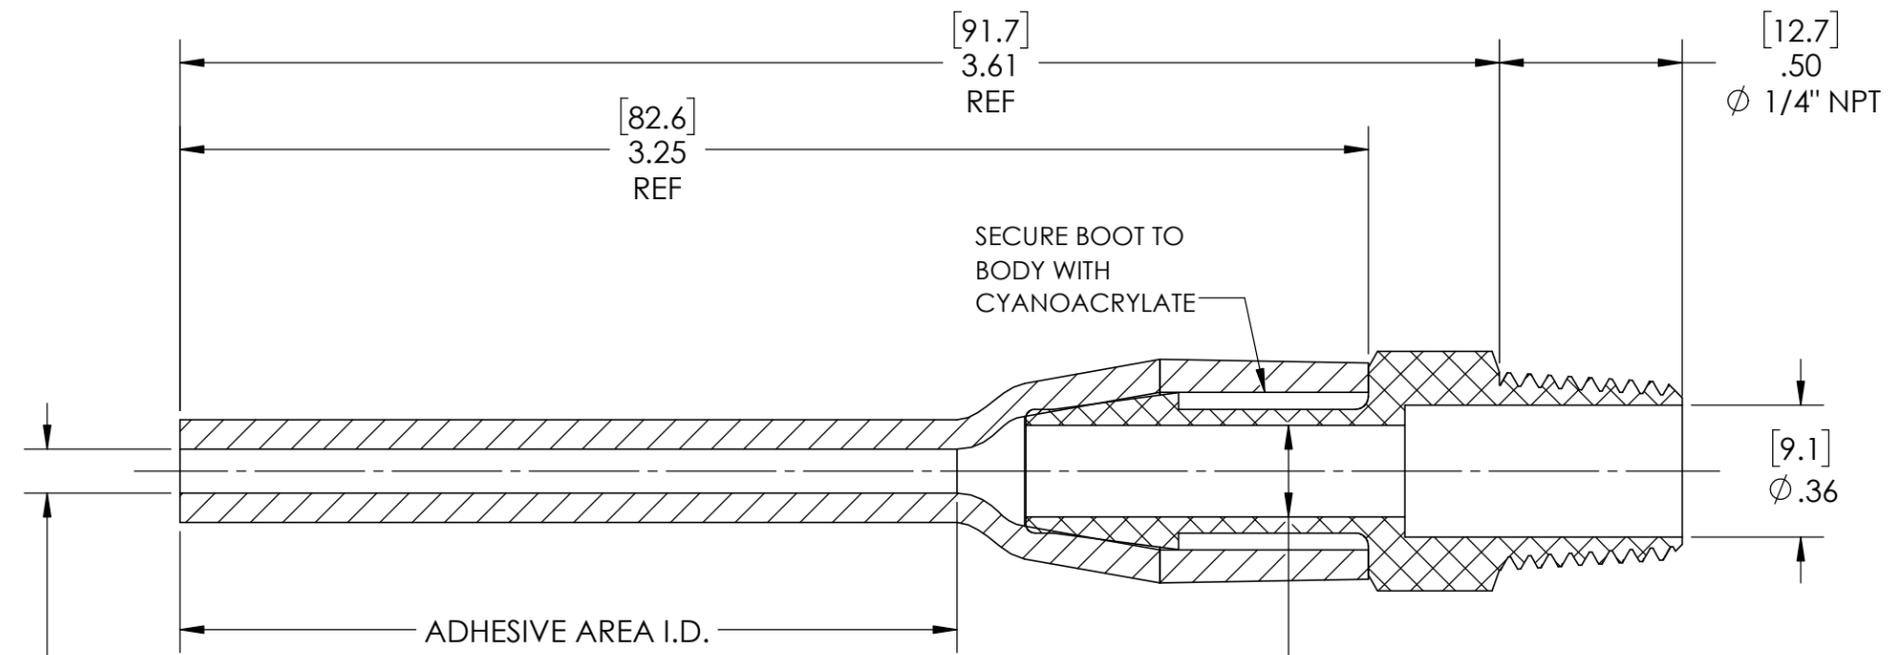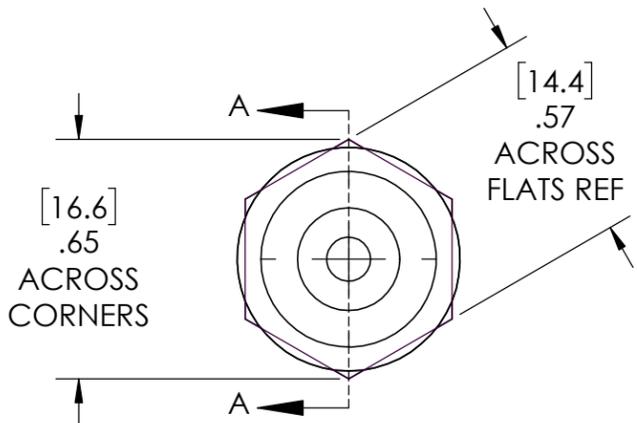

Expanded Min ID= 0.43(10.9) REF
[Recovered Max ID= 0.12(3.1)] REF

SECTION A-A
RECOVERED
SCALE 2 : 1

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
①	Heat-shrinkable boot	P-01 BOOT	Flame Retardant Polyolefin
②	Adapter	5463K48	Nylon
③			
④			
⑤	Adhesive		Hotmelt Polyamide

NU-TECH

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/32
ONE DECIMAL PLACE ± 0.060
TWO DECIMAL PLACE ± 0.025
THREE DECIMAL PLACE ± 0.010

PART NO.
NUP-01
DWG. NO.
NUP-01-ASSY

DO NOT SCALE DRAWING

WEIGHT: 0.024 REV **B**

DRAWN: MLJ

DATE: 2/2/2026

SCALE: 2:1

SHEET 1 OF 1