





AS SUPPLIED  
(EXPANDED STATE)

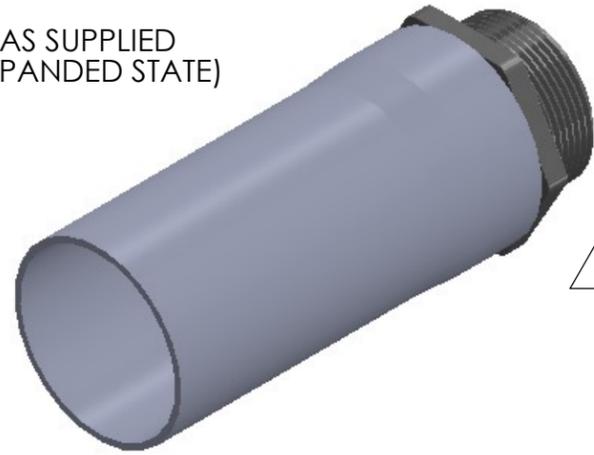

RECOVERED  
STATE

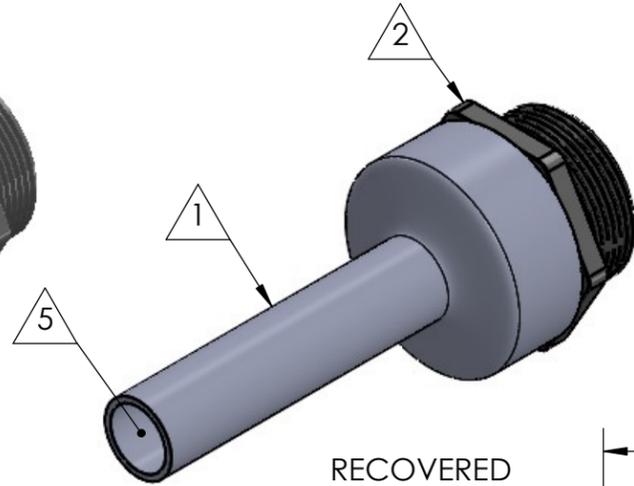

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	11/20/2025
B	REFINE DIMENSIONS AND DECIMAL PRECISION	12/16/2025
C	UPDATE TOLERANCE TABLE	12/29/2025

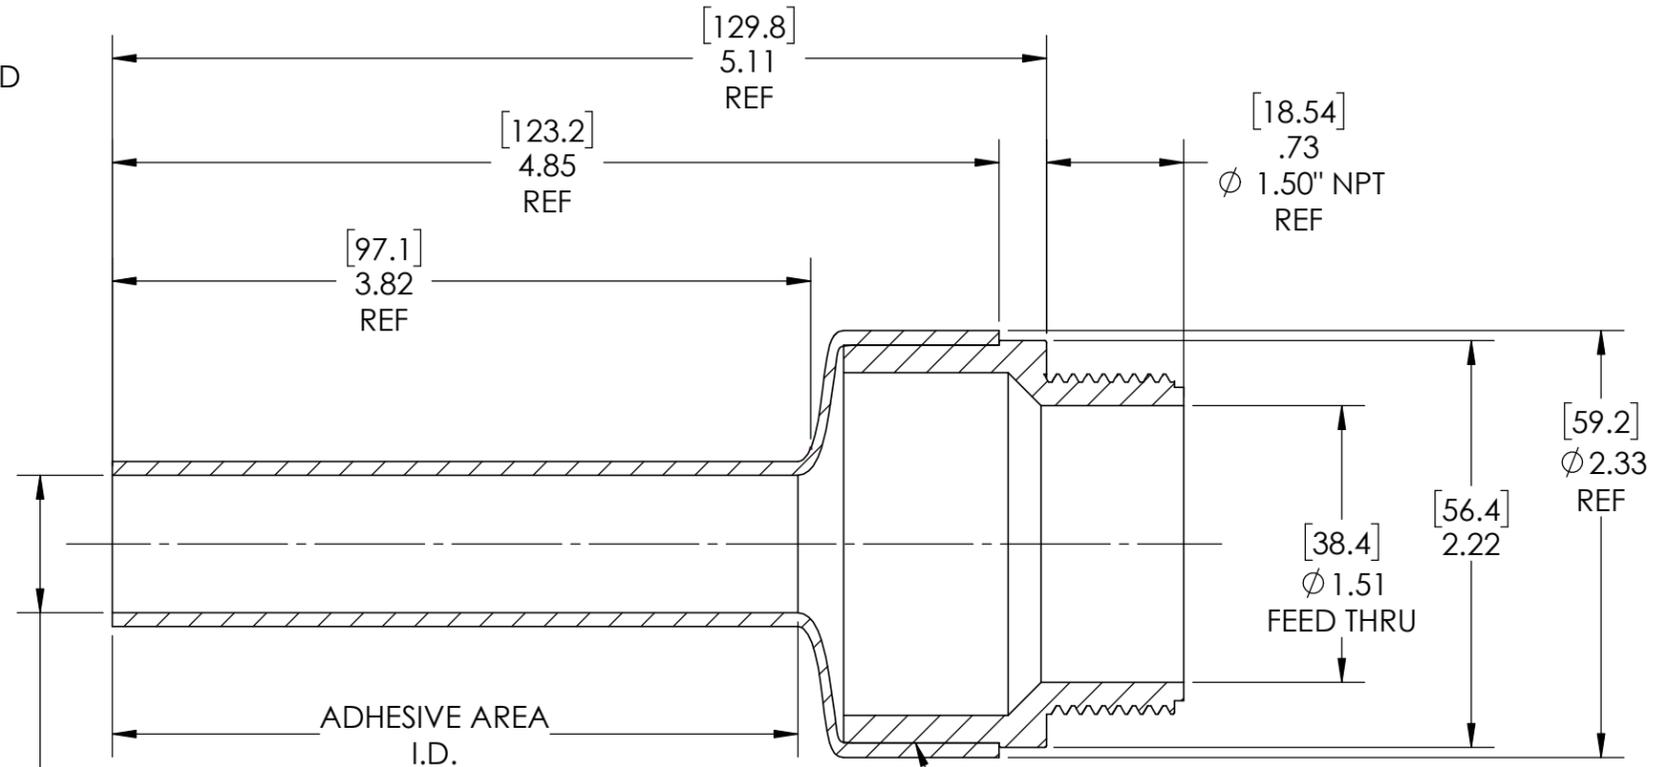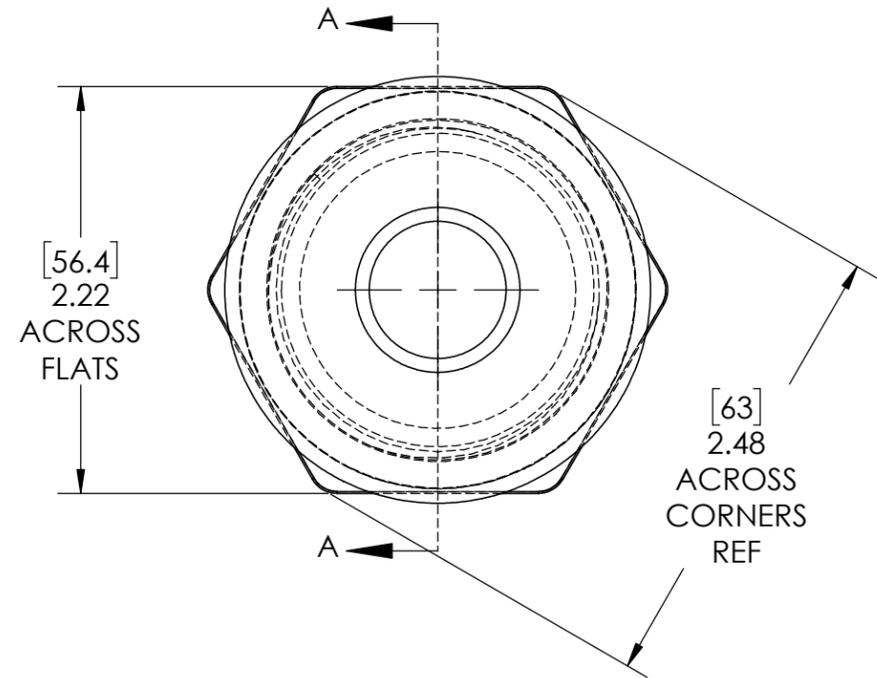

Expanded Min ID= 2.10(53.3) REF  
[Recovered Max ID= 0.75(19.1)] REF

SECTION A-A  
RECOVERED  
SCALE 1 : 1

SECURE BOOT TO  
BODY WITH  
CYANOACRYLATE

NOTES:

- ITEM# 1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
①	Heat-shrinkable boot	P-4A BOOT	Flame Retardant Polyolefin
②	Body	P-4AB	Glass Fiber Reinforced, PBT
③			
④			
⑤	Adhesive		Hotmelt Polyamide

**NU-TECH**

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL ±1/32  
ONE DECIMAL PLACE ± 0.060  
TWO DECIMAL PLACE ± 0.025  
THREE DECIMAL PLACE ± 0.010

DO NOT SCALE DRAWING

DRAWN: MLJ

DATE: 2/3/2026

PART NO.

**NUP-4A**

DWG. NO.

**NUP-4A-ASSY**

WEIGHT:

**0.196**

REV **C**

SCALE:

**1:1**

SHEET 1 OF 1