

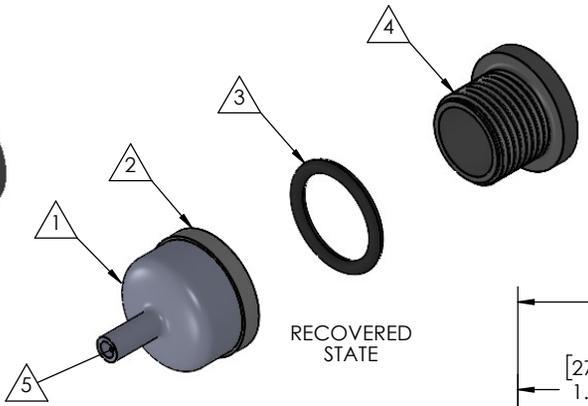


8 7 6 5 4 3 2 1


AS SUPPLIED
(EXPANDED STATE)




RECOVERED STATE

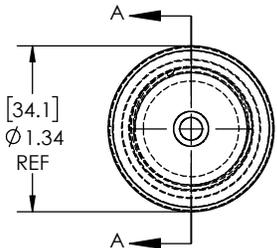

Expanded Min ID=0.98(24.8) REF
[Recovered Max ID=0.25(6.4)] REF

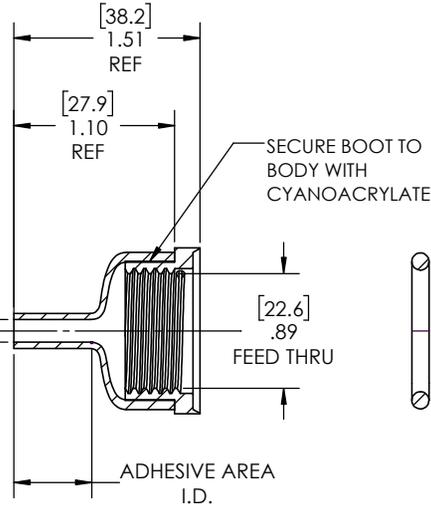

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:
ASSEMBLY MAY BE INSTALLED IN PANELS FROM
0.08"(2.0mm) - 0.35"(8.9mm).
RECCOMENDED DRILL HOLE DIAMETER
OF 1.00" (25.4mm)

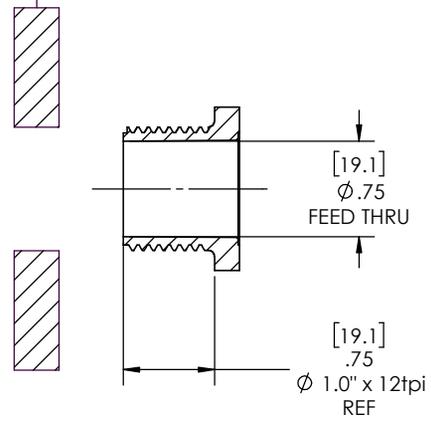

SECTION A-A
RECOVERED
SCALE 1 : 1

NOTES:

- ITEM# 1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	Heat-shrinkable boot	S-2X BOOT	Flame Retardant Polyolefin
2	Body	S-2XB	Glass Fiber Reinforced, PBT
3	O-ring	AS-214	Buna
4	Nut	S-2XN	Glass Fiber Reinforced, PBT
5	Adhesive		Hotmelt Polyamide

NU-TECH

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: 1/32
ONE DECIMAL PLACE ± 0.060
TWO DECIMAL PLACE ± 0.025
THREE DECIMAL PLACE ± 0.010

PART NO.
NUS-2X

DWG. NO. **NUS-2X-ASSY**

WEIGHT: **0.052**

REV **C**

DO NOT SCALE DRAWING

DRAWN: MLJ

DATE: 2/3/2026

SCALE: 1:1

SHEET 1 OF 1

8 7 6 5 4 3 2 1