


8 7 6 5 4 3 2 1


REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	10/27/2025
B	REFINE DIMENSIONS AND DECIMAL PRECISION	12/16/2025
C	UPDATE TOLERANCE TABLE	12/29/2025

AS SUPPLIED
(EXPANDED STATE)

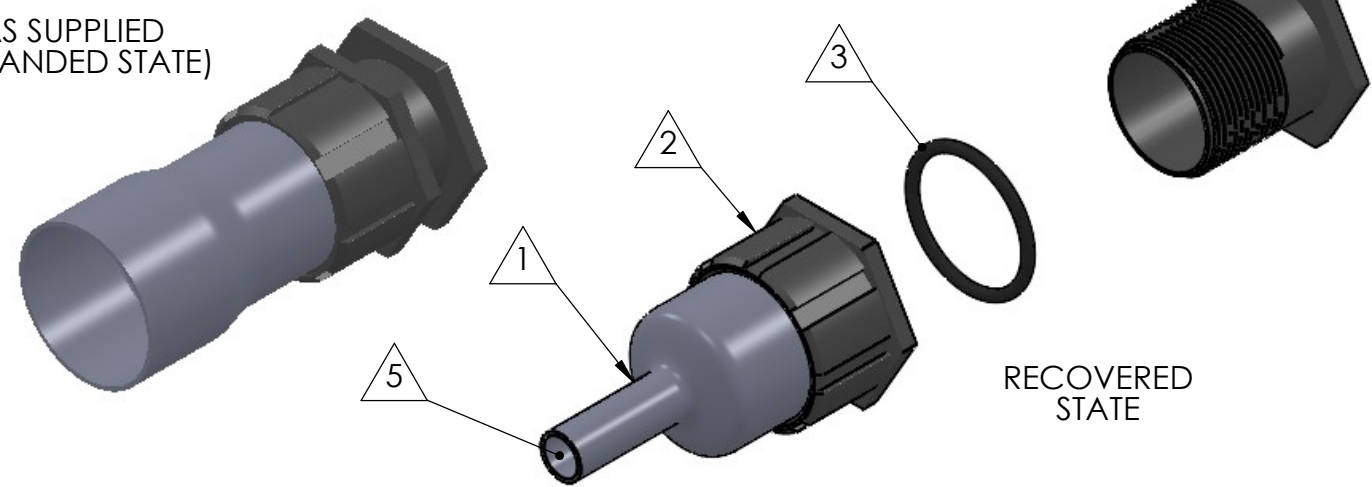

RECOVERED
STATE

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:
ASSEMBLY MAY BE INSTALLED IN PANELS FROM
0.59"(15.0mm) - 1.80"(45.7mm).
RECCOMENDED DRILL HOLE DIAMETER
OF 2.36" (59.9mm)

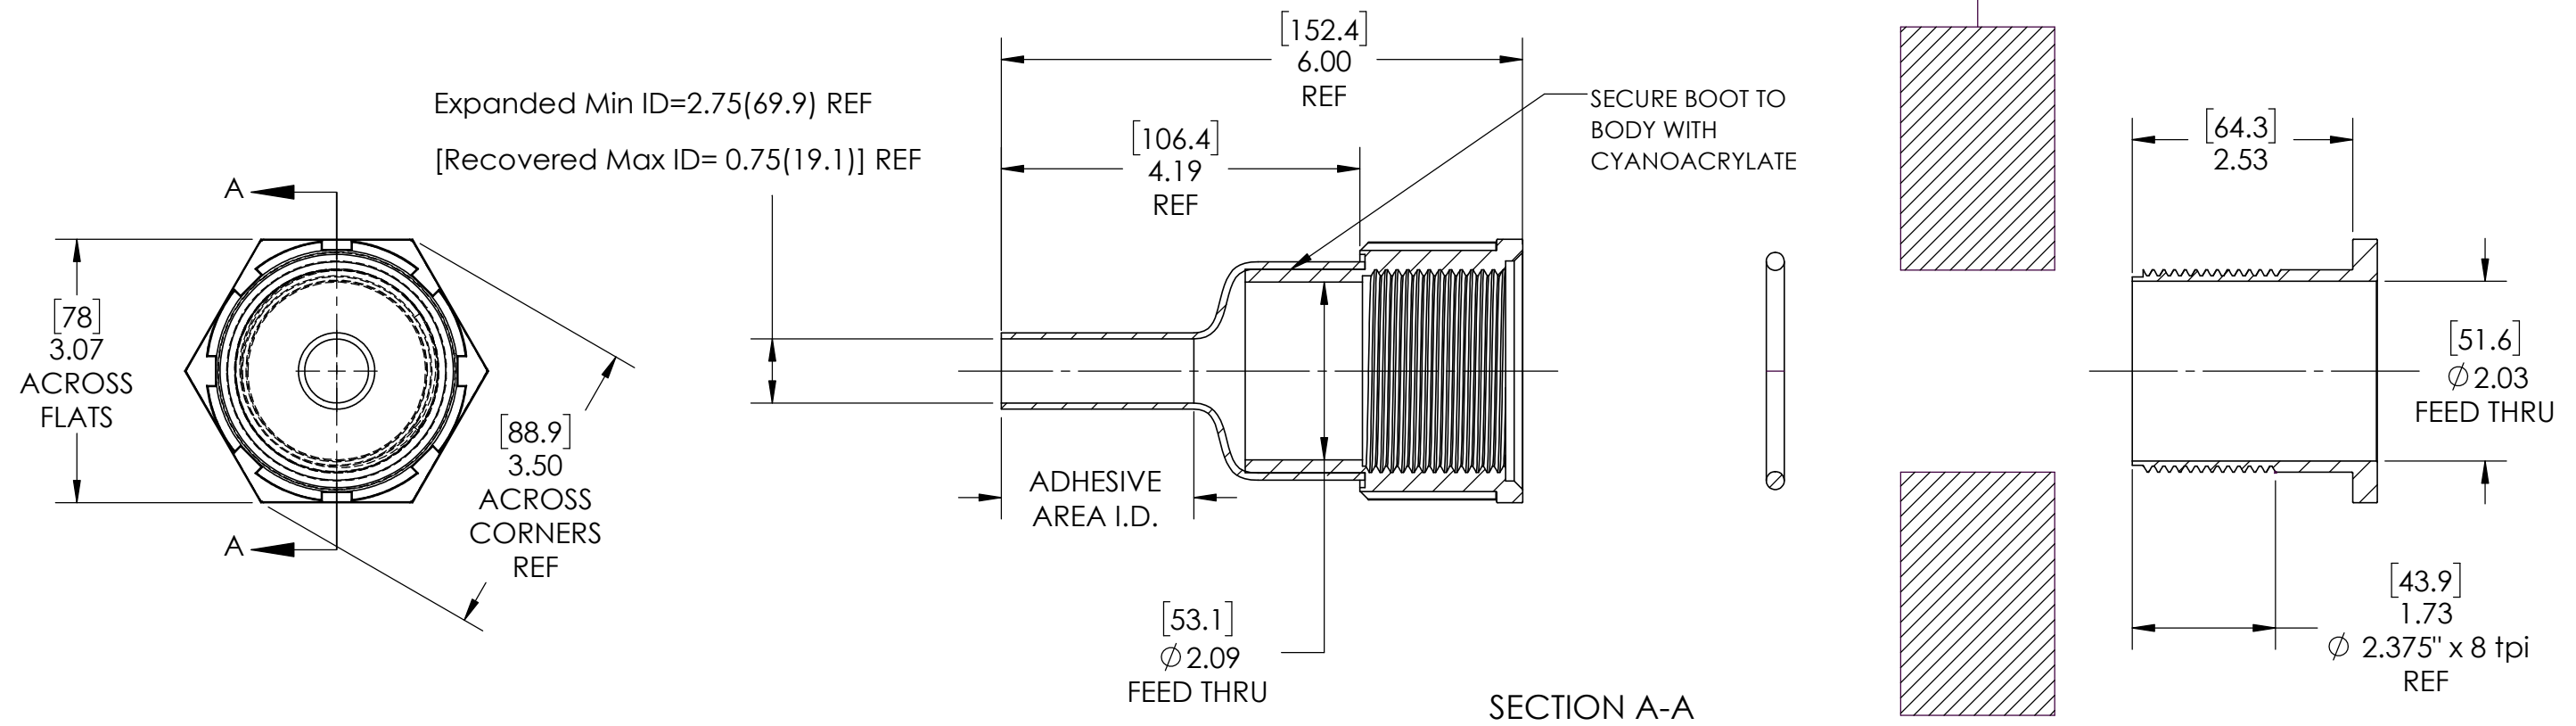

SECTION A-A
RECOVERED
SCALE 1 : 2

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
①	Heat-shrinkable boot	S-4X BOOT	Flame Retardant Polyolefin
②	Body	S-4XB	Glass Fiber Reinforced, PBT
③	O-ring	AS-332	Buna
④	Nut	S-4XLN	Glass Fiber Reinforced, PBT
⑤	Adhesive		Hotmelt Polyamide

NU-TECH

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/32
ONE DECIMAL PLACE ± 0.060
TWO DECIMAL PLACE ± 0.025
THREE DECIMAL PLACE ± 0.010

PART NO.
NUS-4XLN

DWG. NO. **NUS-4XLN-ASSY**

WEIGHT: **0.58** REV **C**

DRAWN: MLJ

DATE: 2/3/2026

SCALE: 1:2

SHEET 1 OF 1

8 7 6 5 4 3 2 1