




AS SUPPLIED
(EXPANDED STATE)

RECOVERED
STATE

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	9/23/2025
B	REFINE DIMENSIONS AND DECIMAL PRECISION	12/16/2025
C	UPDATE TOLERANCE TABLE	12/29/2025

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:
ASSEMBLY MAY BE INSTALLED IN PANELS FROM
0.18"(4.4mm) - 0.95"(24.1mm).
RECCOMENDED DRILL HOLE DIAMETER
OF 3.50" (88.9mm)

Expanded Min ID=2.96(75.2) REF
[Recovered Max ID= 1.43(36.3)] REF

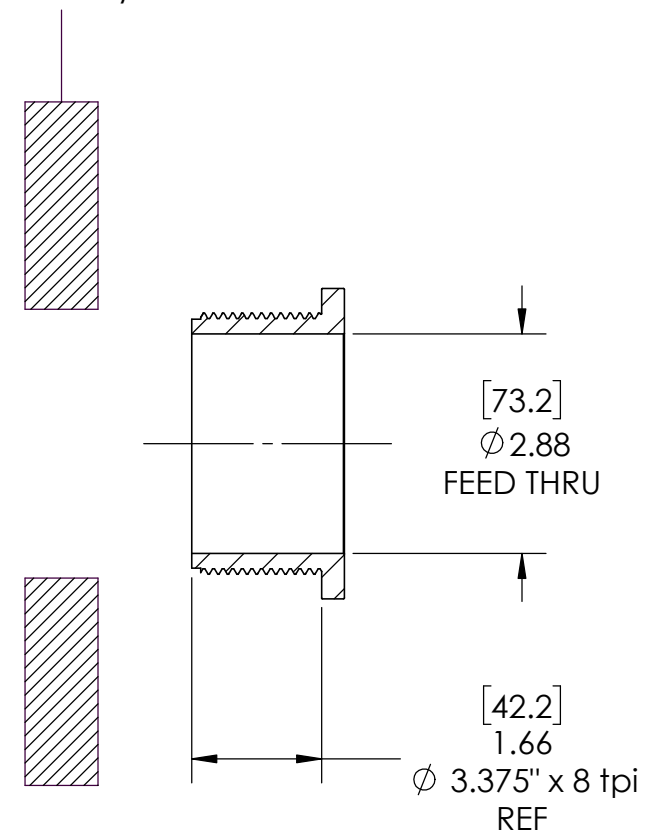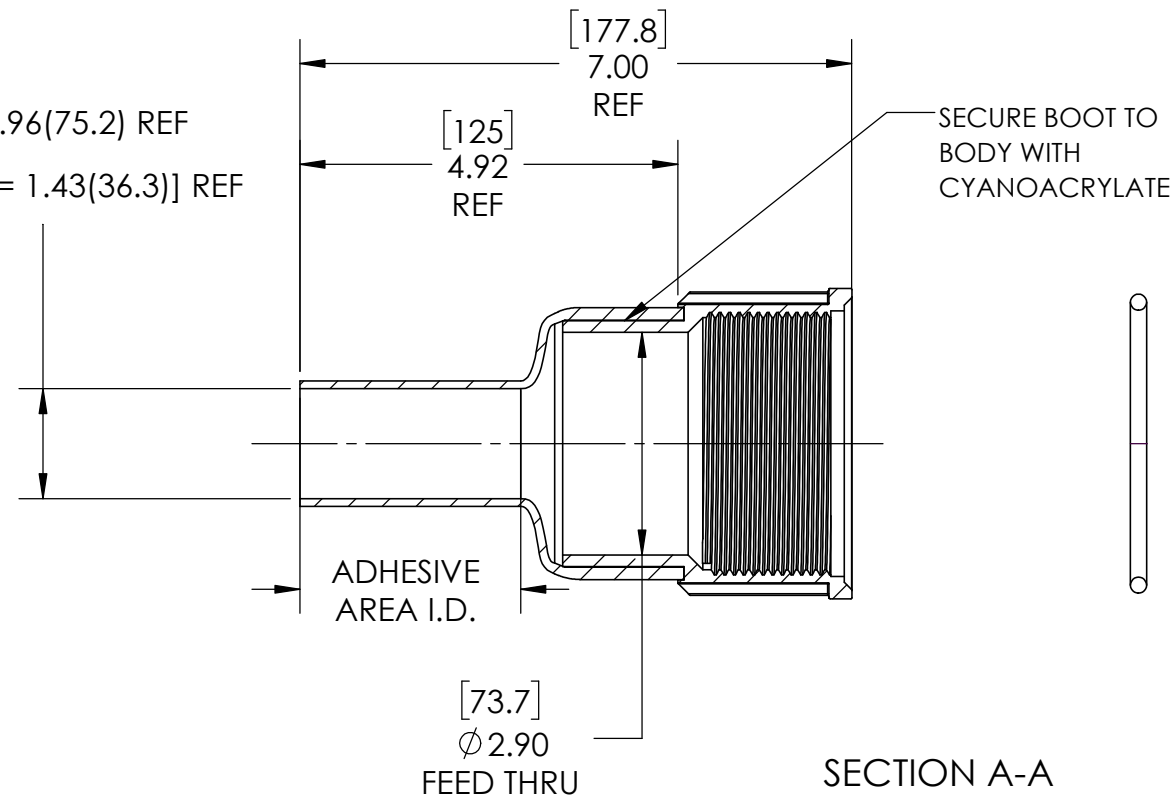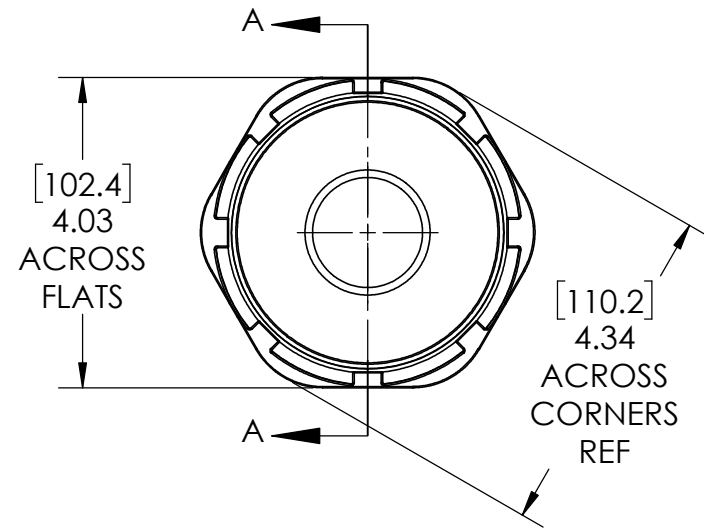

- NOTES:
- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
 - FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
①	Heat-shrinkable boot	S-5 BOOT	Flame Retardant Polyolefin
②	Body	S-5B	Glass Fiber Reinforced, PBT
③	O-ring	AS-340	Buna
④	Nut	S-5N	Glass Fiber Reinforced, PBT
⑤	Adhesive		Hotmelt Polyamide

NU-TECH

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/32
ONE DECIMAL PLACE ± 0.060
TWO DECIMAL PLACE ± 0.025
THREE DECIMAL PLACE ± 0.010

PART NO. **NUS-5**

DWG. NO. **NUS-5-ASSY**

WEIGHT: **0.978**

REV **C**

DO NOT SCALE DRAWING
DRAWN: MLJ DATE: 2/3/2026

SCALE: 1:2.5

SHEET 1 OF 1