



AS SUPPLIED
(EXPANDED STATE)

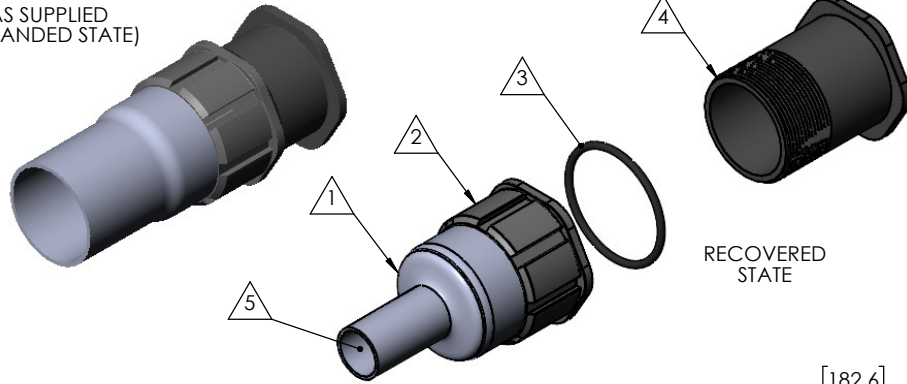

RECOVERED
STATE

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	10/27/2025
B	REFINE DIMENSIONS AND DECIMAL PRECISION	12/16/2025
C	UPDATE TOLERANCE TABLE	12/29/2025

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:
ASSEMBLY MAY BE INSTALLED IN PANELS FROM
2.38"(60.3mm) - 3.63"(92.1mm).
RECCOMENDED DRILL HOLE DIAMETER
OF 3.50" (88.9mm)

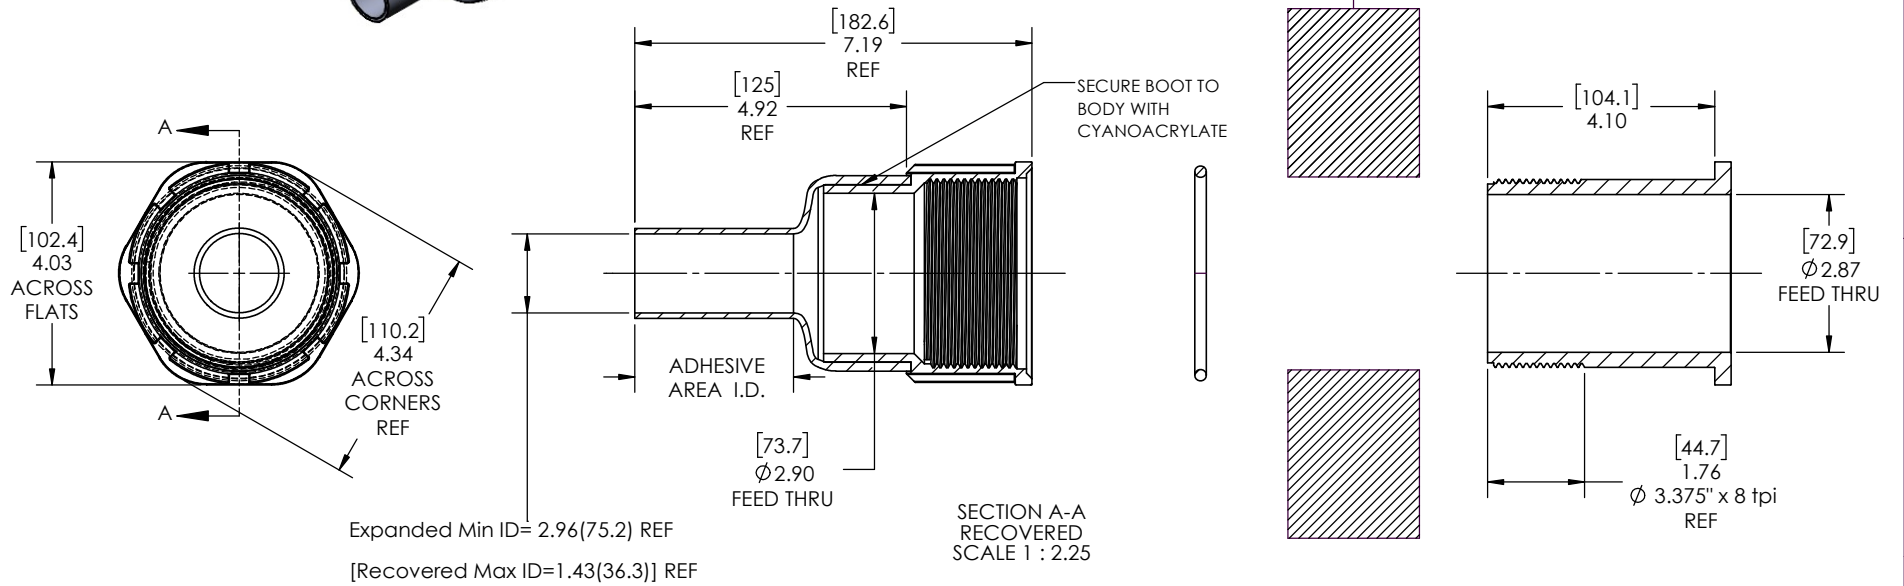

Expanded Min ID= 2.96(75.2) REF
[Recovered Max ID=1.43(36.3)] REF

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	Heat-shrinkable boot	S-5 BOOT	Flame Retardant Polyolefin
2	Body	S-5B	Glass Fiber Reinforced, PBT
3	O-ring	AS-340	Buna
4	Nut	S-5-4LN	Glass Fiber Reinforced, PBT
5	Adhesive		Hotmelt Polyamide

NU-TECH

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: 1/32
ONE DECIMAL PLACE ± 0.040
TWO DECIMAL PLACE ± 0.025
THREE DECIMAL PLACE ± 0.010
DO NOT SCALE DRAWING

PART NO.
NUS-5-4LN

DWG. NO. **NUS-5-4LN-ASSY**

WEIGHT: **1.246** REV **C**

DRAWN: MLJ DATE: 2/3/2026 SCALE: 1:2.25 SHEET 1 OF 1