


REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	10/28/2025
B	REFINE DIMENSIONS AND DECIMAL PRECISION	12/16/2025
C	UPDATE TOLERANCE TABLE	12/29/2025

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:
ASSEMBLY MAY BE INSTALLED IN PANELS FROM
0.18"(4.4mm) - 0.95"(24.1mm).
RECCOMENDED DRILL HOLE DIAMETER
OF 3.50" (88.9mm)

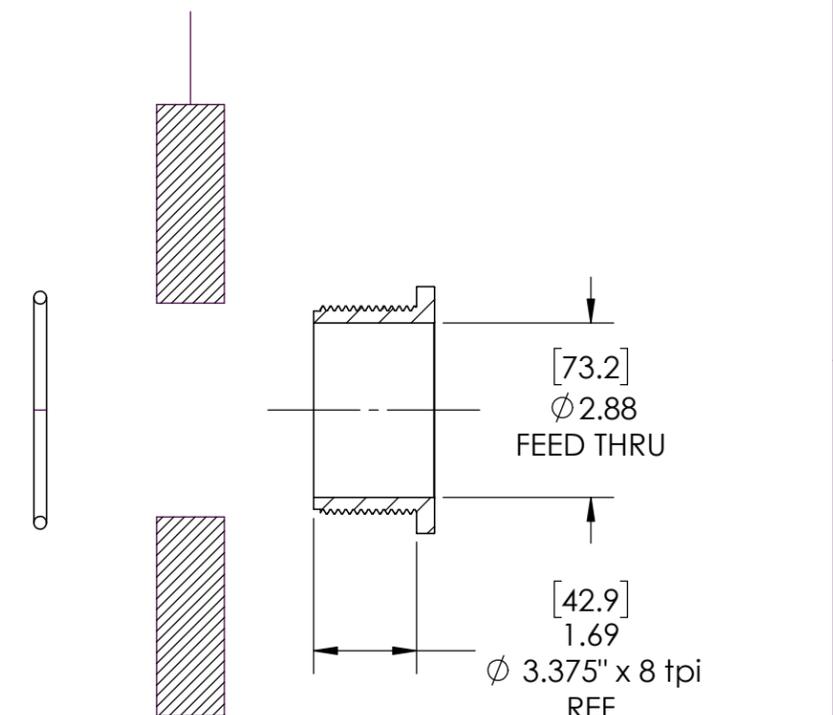

- NOTES:
- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/2"
 - FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
①	Heat-shrinkable boot	S-5X BOOT	Flame Retardant Polyolefin
②	Body	S-5B	Glass Fiber Reinforced, PBT
③	O-ring	AS-340	Buna
④	Nut	S-5N	Glass Fiber Reinforced, PBT
⑤	Adhesive		Hotmelt Polyamide

NU-TECH

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/32 ONE DECIMAL PLACE ± 0.060 TWO DECIMAL PLACE ± 0.025 THREE DECIMAL PLACE ± 0.010		PART NO. NUS-5X	
DO NOT SCALE DRAWING		DWG. NO. NUS-5X-ASSY	
DRAWN: MLJ	DATE: 2/3/2026	WEIGHT: 1.272	REV C
SCALE: 1:3		SHEET 1 OF 1	