



AS SUPPLIED
(EXPANDED STATE)

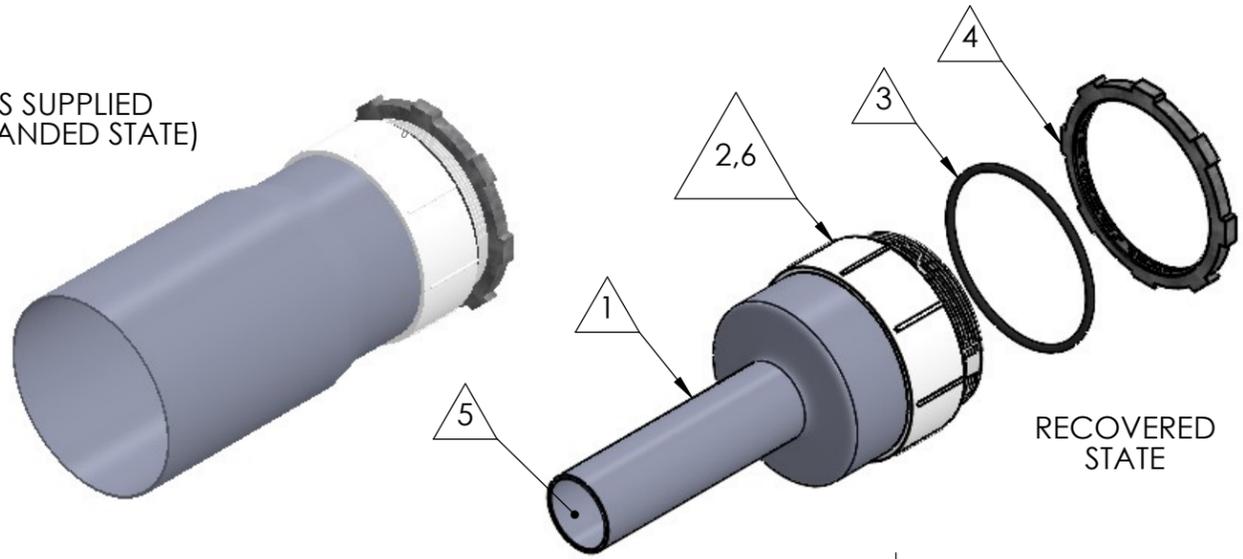


RECOVERED
STATE

NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:
ASSEMBLY MAY BE INSTALLED IN PANELS FROM
0.10"(2.5mm) - 0.51"(13.0mm).
RECCOMENDED DRILL HOLE DIAMETER
OF 5.53" (140.5mm)


REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	11/5/2025
B	UPDATE TOLERANCE TABLE	12/29/2025

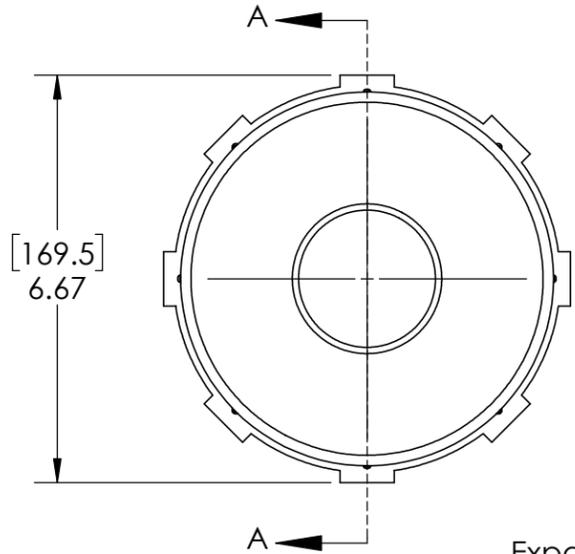

Expanded Min ID= 6.20(157.5) REF
[Recovered Max ID= 2.25(57.2)] REF

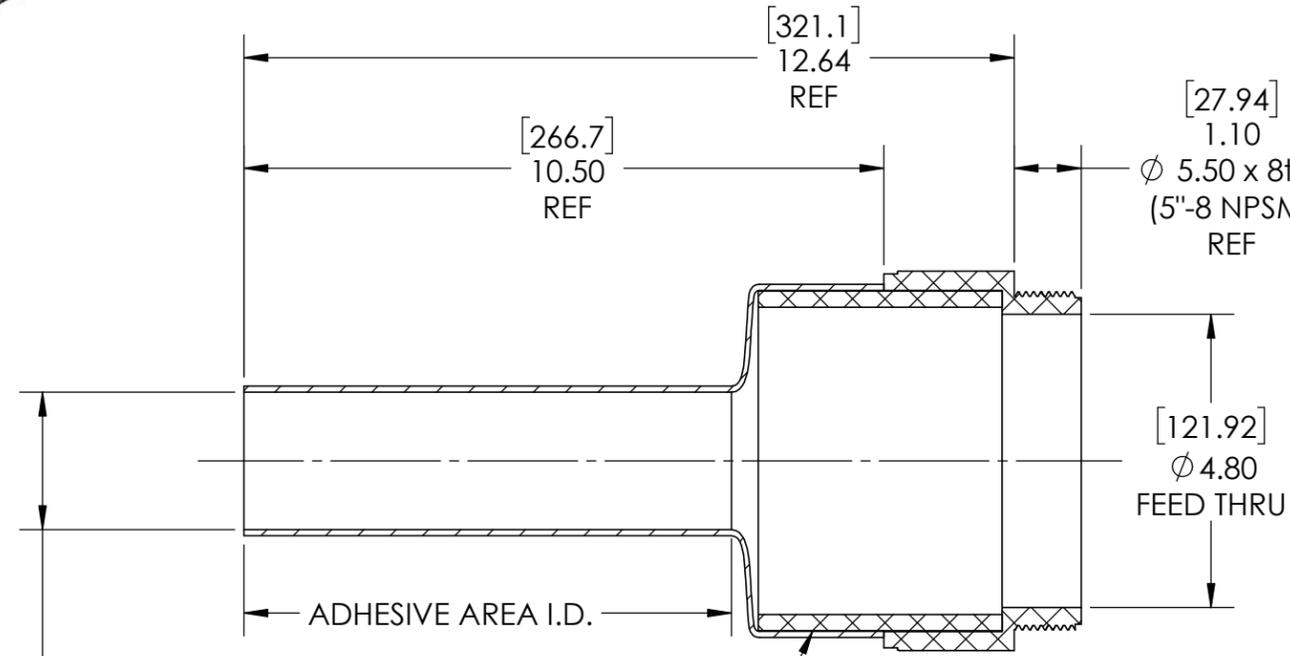

SECTION A-A
RECOVERED
SCALE 1 : 3

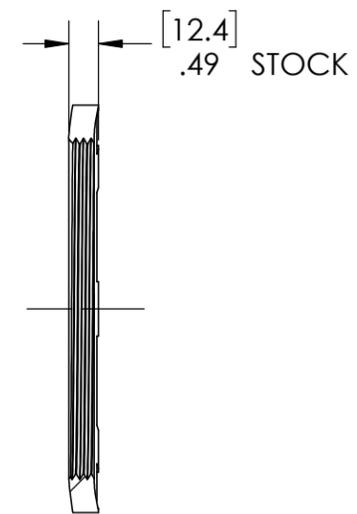

- NOTES:
- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/2"
 - FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
①	Heat-shrinkable boot	S-7 BOOT	Flame Retardant Polyolefin
②	Body	TA-50	PVC Rigid
③	O-ring	AS-357	Buna
④	5" NPSM Conduit Nut	LN111	Zinc Plated Steel
⑤	Adhesive		Hotmelt Polyamide
⑥	Insert	S-7 INSERT	PVC Rigid SCH40 Pipe

NU-TECH

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/32
ONE DECIMAL PLACE ± 0.060
TWO DECIMAL PLACE ± 0.025
THREE DECIMAL PLACE ± 0.010

PART NO.	NUS-7	
DWG. NO.	NUS-7-ASSY	
WEIGHT:	3.143	REV B
SCALE:	1:3	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

DO NOT SCALE DRAWING
DRAWN: MLJ DATE: 2/3/2026