


8 7 6 5 4 3 2 1


AS SUPPLIED  
(EXPANDED STATE)

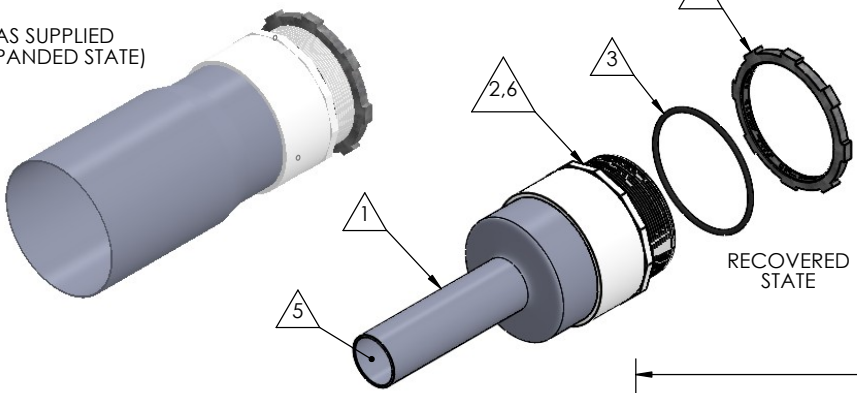


RECOVERED STATE

REVISIONS		
REV.	DESCRIPTION	DATE
A	UPDATE DRAWING TO 2025 STANDARDS	11/5/2025
B	UPDATE TOLERANCE TABLE	12/29/2025


NOTE: REFERENCE FOR SEAL ASSEMBLY INSTALLATION:  
ASSEMBLY MAY BE INSTALLED IN PANELS FROM  
0.10"(2.5mm) - 1.38"(34.9mm).  
RECCOMENDED DRILL HOLE DIAMETER  
OF 5.53" (140.5mm)

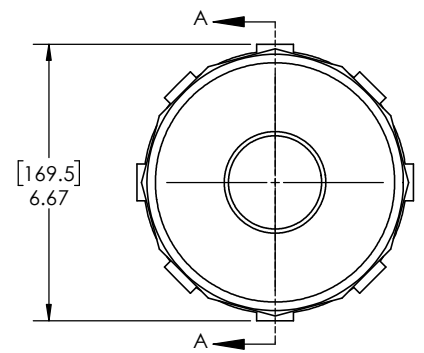

Expanded Min ID= 6.20(157.5) REF  
[Recovered Max ID= 2.25(57.2)] REF

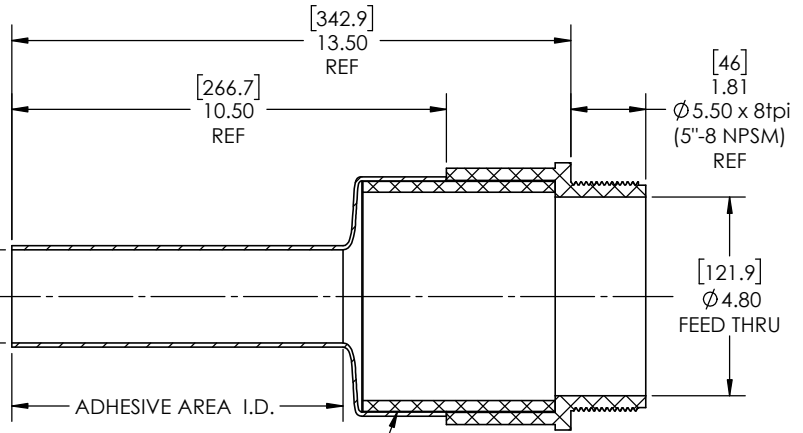

SECTION A-A  
RECOVERED  
SCALE 1 : 3

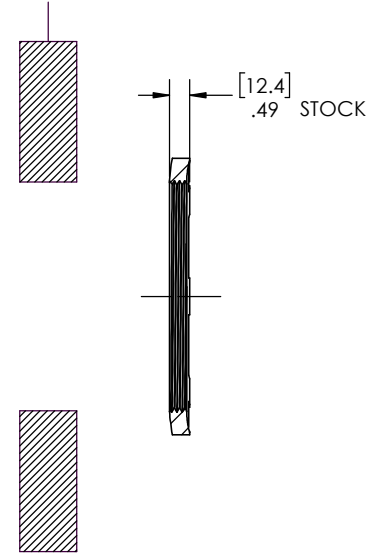

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/2"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	Heat-shrinkable boot	S-7 BOOT	Flame Retardant Polyolefin
2	Body	TA-50	PVC Rigid
3	O-ring	AS-357	Buna
4	5" NPSM Conduit Nut	LN111	Zinc Plated Steel
5	Adhesive		Hotmelt Polyamide
6	Insert	S-7 Insert	PVC Rigid SCH40 Pipe

**NU-TECH**

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL ±1/32  
ONE DECIMAL PLACE ± 0.060  
TWO DECIMAL PLACE ± 0.025  
THREE DECIMAL PLACE ± 0.010  
DO NOT SCALE DRAWING

PART NO.  
**NUS-7XLG**

DWG. NO. **NUS-7XLG-ASSY**

WEIGHT: **3.801** REV **B**

DRAWN: MLJ DATE: 2/3/2026 SCALE: 1:3 SHEET 1 OF 1

8 7 6 5 4 3 2 1

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF  
Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.