
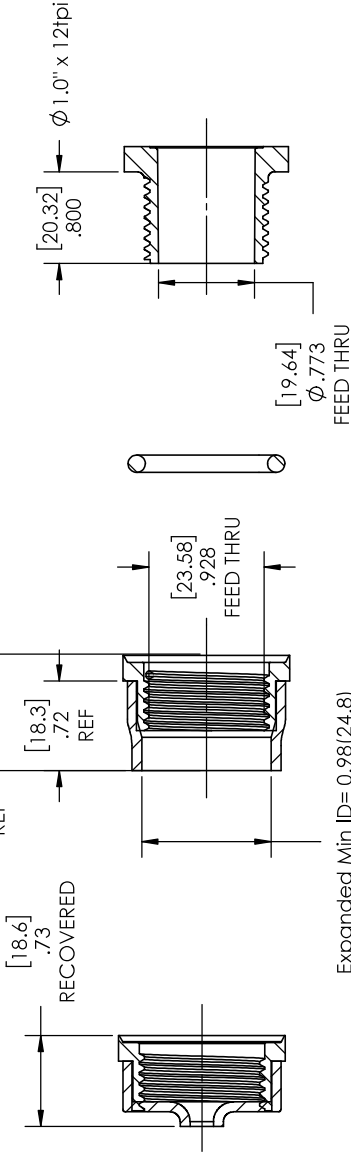
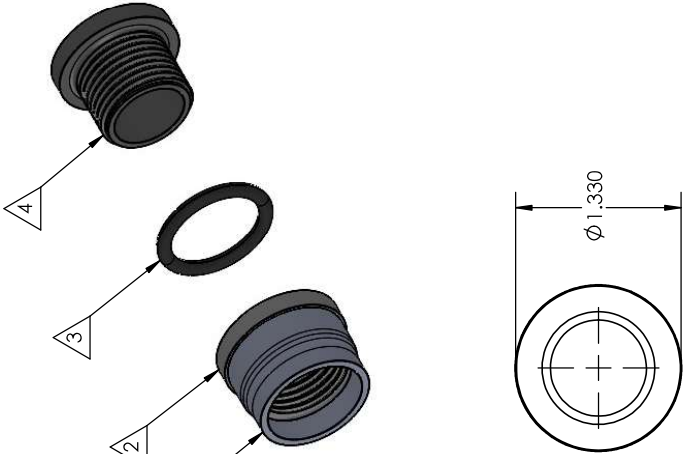


REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL DRAWING RELEASE	10/7/2025

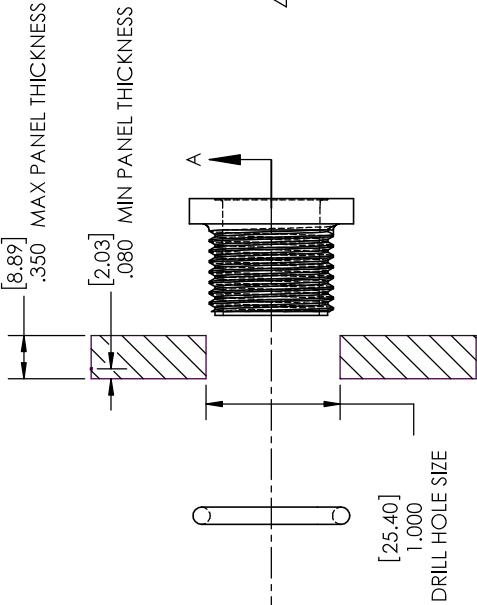

Expanded Min ID= 0.98(24.8)
[Recovered Max ID= 0.25(6.4)]

SECTION A-A
SCALE 1 : 1

NOTES:

- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEViate AS +OR- 1/4"
- FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

S:\Nu-Tech - Products and Components 2025\Assembly Drawings\NUS Single Leg Entry Seals\NUS-2S-0.75\NUS-2X-0.75-ASSY

ITEM		PART DESCRIPTION	PART NO.	MATERIAL
1		Heat-shrinkable boot	S-2X-0.75 BOOT	Flame Retardant Polyolefin
2		Body	S-2XB	Glass Fiber Reinforced, PBT
3		O-ring	AS-214	Buna
4		Nut	S-2XN	Glass Fiber Reinforced, PBT
5		Adhesive		Hotmelt Polyamide

PART NO.		PART NO.	
NUS-2X-0.75		NUS-2X-0.75-ASSY	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONAL ±.1/32 ONE DECIMAL PLACE ±0.020 TWO DECIMAL PLACE ±0.010 THREE DECIMAL PLACE ±0.005 DO NOT SCALE DRAWING		DWG. NO	
		NUS-2X-0.75-ASSY	
		WEIGHT:	
		0.035	
		SCALE:	
		1:1	
		DATE:	
		10/7/2025	
		DRAWN: MLJ	
		SHEET 1 OF 1	