



8 7 6 5 4 3 2 1

REVISIONS		
REV.	DESCRIPTION	DATE
0	INITIAL DRAWING RELEASE	3/5/2026

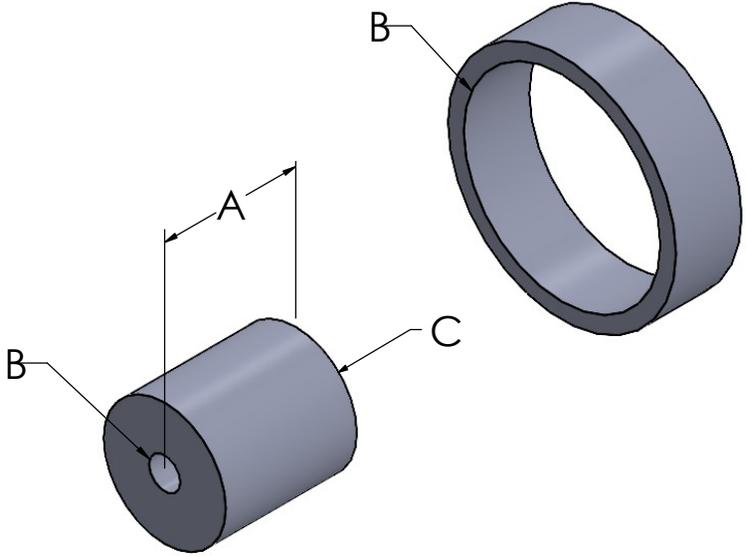

NU TECH CABLE CLAMP HEAT SHRINK GROMMET TO BE PLACED OVER WIRE BUNDLE AT ENTRY POINT TO CLAMP ON CONNECTOR BODY, HEATED TO SHRINK AND CONSTRAIN WIRES, THEN CLAMP ASSEMBLY CAN BE TIGHTENED TO SPECIFICATION AROUND RECOVERED GROMMET FOR ADDED PROTECTION OF WIRES.

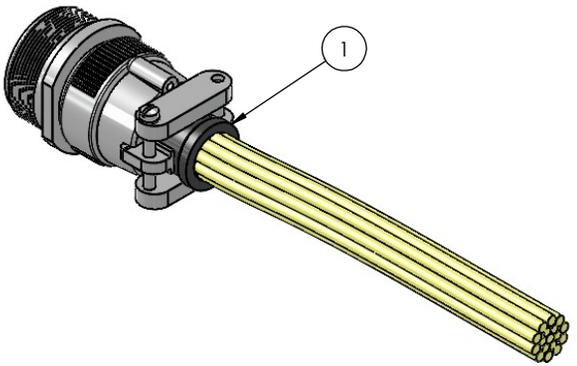

NUTECH PART NO.	COMMON PART NO.	MIN EXPANDED "B"	MAX RECOVERED "B"	O.D. RECOVERED "C"	NOMINAL RECOVERED LENGTH "A"	USE
NUURHR-1	URHR-1	0.75" (19.1mm)	0.12" (3.0mm)	0.47" (11.8mm)	0.50" (12.7mm)	NUHRT-.75
NUURHR-2	URHR-2	0.75" (19.1mm)	0.12" (3.0mm)	0.47" (11.8mm)	0.50" (12.7mm)	NUHRT-.75
NUURHR-3	URHR-3	1.09" (27.7mm)	0.19" (4.7mm)	0.44" (11.2mm)	0.50" (12.7mm)	NUHRT-.185
NUURHR-4	URHR-4	1.09" (27.7mm)	0.19" (4.7mm)	0.44" (11.2mm)	0.75" (19.1mm)	NUHRT-.185
NUURHR-5	URHR-5	1.50" (38.1mm)	0.23" (5.8mm)	0.573 (14.6mm)	0.75" (19.1mm)	NUHRT-1.5

ITEM	PART DESCRIPTION	PART NO.	MATERIAL
1	HEAT SHRINKABLE TUBE	SEE TABLE	FLAME RETARDANT POLYOLEFIN
2	ADHESIVE		HOTMELT POLYAMIDE

NU-TECH

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cross Technology INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Cross Technology INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ±1/16 ONE DECIMAL PLACE ± 0.200 TWO DECIMAL PLACE ± 0.100 THREE DECIMAL PLACE ± 0.050		PART DESC. CABLE CLAMP HEAT SHRINK GROMMET
DWG. NO. NUURHR		REV 0
WEIGHT: 0.01-0.03 lb		SCALE: 3:1
DRAWN: MLJ DATE: 3/5/2026		SHEET 1 OF 1

- NOTES:
- ITEM#1 HEAT SHRINKABLE BOOT MATERIAL IS IN ACCORDANCE WITH POLYOLEFIN STANDARDS DEFINED IN SAE AS81765/1 REFERENCE DIMENSIONS MAY DEVIATE AS MUCH AS +OR- 1/4"
 - ITEM#2 FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD - INTERIOR SURFACES

Q:\Nu-Tech Engineering\Nu-Tech - Products and Components 2025\Parts and Drawings\Cable Clamp HS Grommets\ NUURHR

DO NOT SCALE DRAWING

8 7 6 5 4 3 2 1